

WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

To prevent personal injury or product damage only licensed electricians should install. To avoid electric shock or component damage disconnect power before attempting installation or servicing.

This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.

Disconnect product and allow cooling prior to servicing.

Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.

To prevent product malfunction and/or electrical shock this product must be properly grounded. This luminaire is designed to operate in ambient temperatures ranging from -40°C to 55°C and to be horizontally mounted with the LEDs facing down.

This product must be installed in accordance with the applicable installation code by a Person familiar with the construction and operation of the product and the hazards involved.

In 75°C supply conductors.


This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.

The allowable ambient temperature is 10 °C (50 °F) to 40 °C (104 °F) when configuring the emergency battery kit.

SHOCK HAZARD!



To avoid electric shock or component damage disconnect power before attempting installation or servicing.

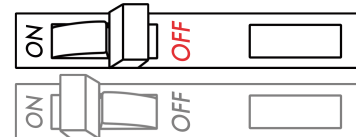

TOOLS REQUIRED


Tools:

1. Sharp Side Cutter
2. Electric Drill
3. Level
4. Measuring Tool
5. Wire Stripper / Knife
6. Philips Screwdrivers
7. Wire Cutters

WIRING


CORD/ SUOOLY WIRING

LUMINAIRE

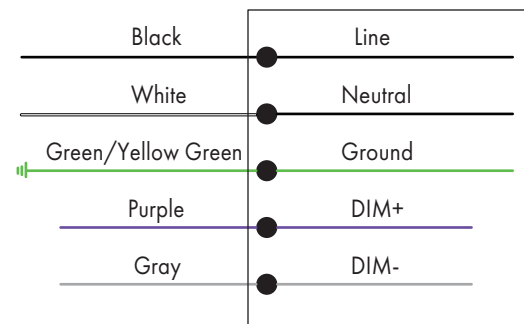


Pendent Mount

1. Finishing the connecting of fixture's input cables, Round rod thread need winding waterproof tape, then rotate the 3/4" conduit to fixture itself; at last, fix the conduit with fixture by M4*8 screws.

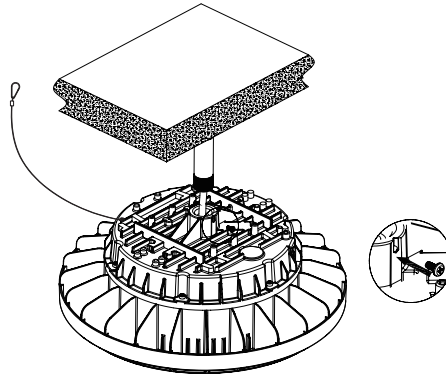

Hook Mount

2. Remove Line Cord Protector first after you get the high bay light.

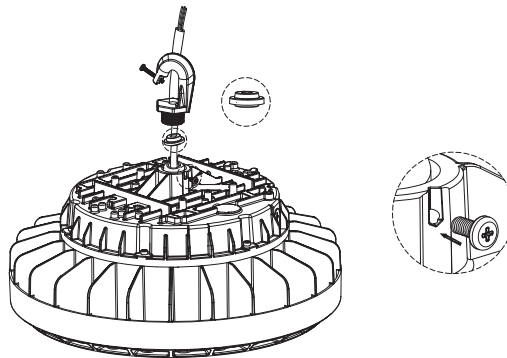

Mounted With J-Box

3. Fix bottom cover of J-box onto fixture and top cover onto ceiling. Pull cable out of pole from J-box top cover.

