LIRON LIGHTING

ALA1 Linear Series

LED Surface Mount Direct Pattern Run Luminaire

Fixture Type:
Project Name:
Location:
Date:

Features:

-1 3/8" Wide advance architectural linear luminaire available in 2FT, 4FT and 8FT
- Direct lighting distribution
- 4 Lens options
- Various mounting option include pendant mount, wall mount and surface mount - see other spec sheet
-Seamless pattern runs with standard L / T /Cross /Y/ V shape or custom pattern
- 120V continuous run up to 40FT and 277V up to 100FT

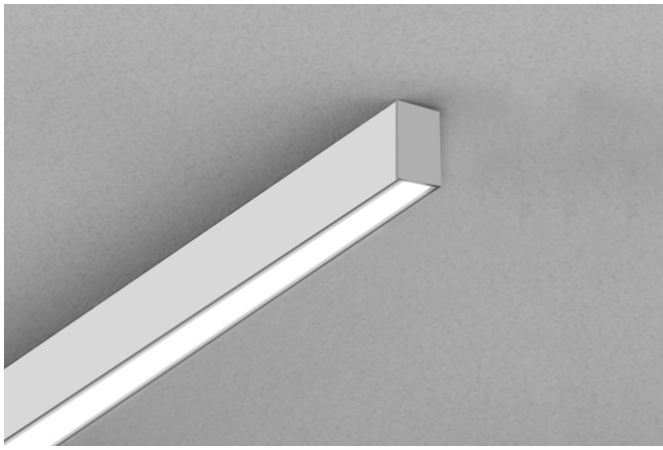

Product Performance Standard

Size	2FT/4FT/8FT	**Power Factor**	>0.9
Weight	3.75lb/6.1lb/12.5lb	**Life Span**	50,000 Hrs
Mounting	Surface Mount	**Dimmable**	1-10V Dimming
Color Temp	3000K/3500K/4000K	**Efficacy**	105lm/W
CRI	80	**Warranty**	5 Years
Input Voltage	120-277V	**Ambient Operation Temperature**	0C° (32°F) ~40C °(104°F)



5 YEAR WARRANTY · UL LISTED · ENERGY STAR

Ordering Guide - (Linear Surface Mount direct pattern run luminaire)

Example: ALA1-D-35-AL-DWR44-WH-ALA-CC 4444

Fixture	LENS	CCT	Mounting	Finish	Pattern Connector -Nominal Linear FT	Optional Accessories
ALA1 Downlight Version	D = diffuser C = Conves L = Louver R = Reflector	30K = 3000K 35K = 3500K 40K = 4000K	AL-S2 = Surface Mount Kit for 2 FT fixture AL-S4 = Surface Mount Kit for 4 FT fixture AL-S8 = Surface Mount Kit for 8 FT fixture	WH = White BK = Black	ALA-CC = Cross Connector (A′ B′ C′ D′ ☐ ☐ ☐ ☐) ALA-TC = T Connector (A′ B′ C′ D′ ☐ ☐ ☐ X) ALA-YC = Y Connector (A′ B′ C′ D′ ☐ ☐ ☐ X) ALA-LC = L Connector (A′ B′ C′ D′ ☐ ☐ X X) ALA-VC = V Connector (A′ B′ C′ D′ ☐ ☐ X X) Custom Pattern	EM = 8W external emergency battery backup (A-EMBK8WLV)

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LIRON LIGHTING

ALA1 Linear Series

LED Surface Mount Direct Pattern Run Luminaire

Fixture Type:
Project Name:
Location:
Date:

Performance Data:

Lens	Diffuser	Louver	Micro Reflector	Convex
Lengths	2ft , 4ft , 8ft	2ft , 4ft , 8ft	2ft , 4ft , 8ft	2ft , 4ft , 8ft
Wattage	**20W/40W/80W**	**20W/40W/80W**	**20W/40W/80W**	**20W/40W/80W**
Efficacy	**75 lm/W**	**67 lm/W**	**100 lm/W**	**90 lm/W**
Beam Angle	Down 100°	Down 60°	Down 48°	Down 110°

Lens:



Diffuser
(-D)



Micro Reflector
(-R)



Louver
(-L)



Convex Lens
(-C)

Dimensions:

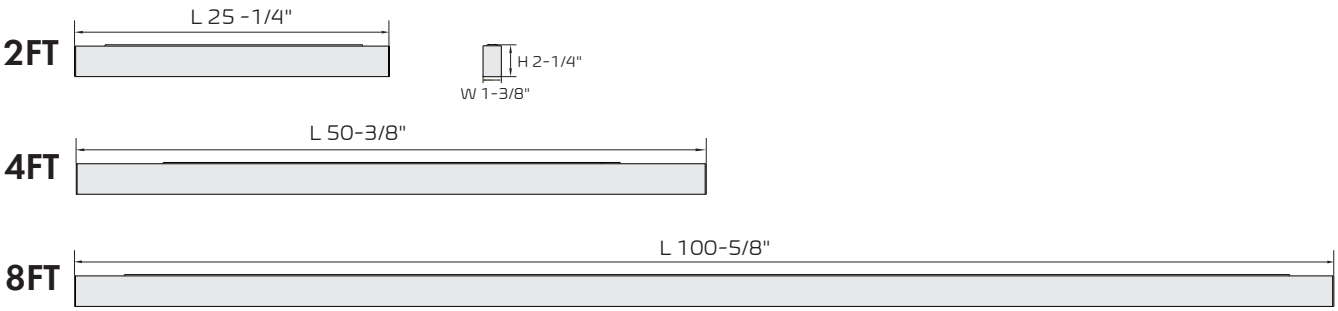

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LIRON LIGHTING

ALA1 Linear Series

LED Surface Mount Direct Pattern Run Luminaire

Fixture Type:
Project Name:
Location:
Date:

Pattern Connector:



Cross Connector

Provide A/B/C/D dimension
Example: A=4′, B=4′, C=4′, D=4′
Part number:
ALA1-D-35K-AL-DWR44-WH-ALA-CC4444



T Shape Connector

Provide A/B/C dimension
Example: A=4′, B=2′, C=4′
Part number:
ALA1-D-35K-AL-DWR44-WH-ALA-TC424



Y Shape Connector

Provide A/B/C dimension
Example: A=4′, B=4′, C=4′
Part number:
ALA1-D-35K-AL-DWR44-WH-ALA-YC444

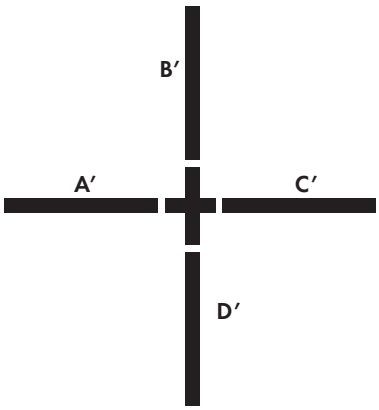

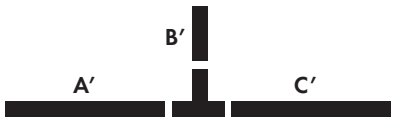

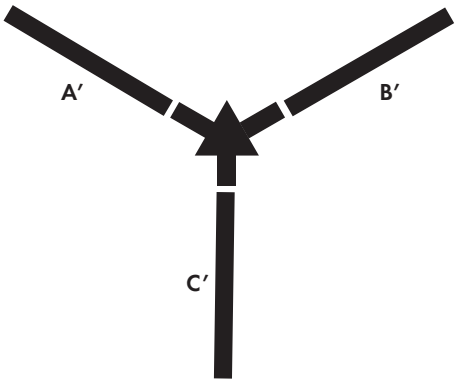



V Shape Connector

Provide A/B dimension
Example: A=4′, B=4′
Part number:
ALA1-D-35K-AL-DWR44-WH-ALA-VC44



L Shape Connector

Provide A/B dimension
Example: A=4′, B=4′
Part number:
ALA1-D-35K-AL-DWR44-WH-ALA-lC44



Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LIRON LIGHTING

ALA1 Linear Series

LED Surface Mount Direct Pattern Run Luminaire

Fixture Type:
Project Name:
Location:
Date:

Custom Pattern:

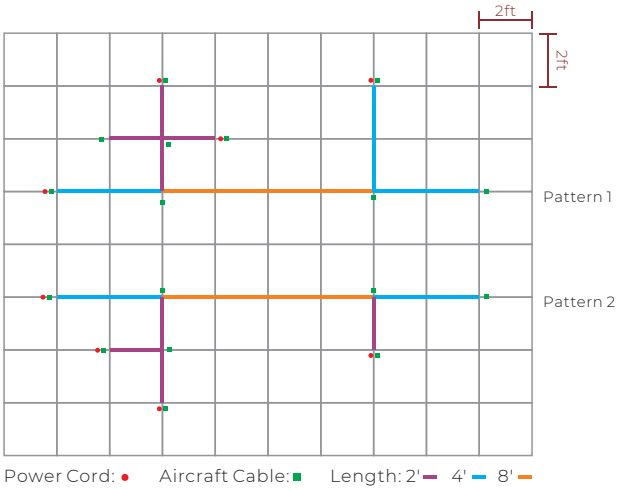

2FT

2FT

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.