

WARNING


PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

1. Consult a qualified electrician to ensure correct branch circuit conductor.
2. The product should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
3. Risk of electric shock. Ensure that main power source is off when wiring or soldering the sections of the product.
4. Before installing this fixture or doing any maintenance, make sure to turn off the power supply at the circuit breaker or fuse box.
5. Check to make sure that all fixture connections have been properly made and the fixture is grounded to avoid potential electrical shocks.
6. Designed for use in AC 120-347V, 50/60Hz, 0-10V dimming, protected circuit.

SHOCK HAZARD!



To avoid electric shock or component damage disconnect power before attempting installation or servicing.

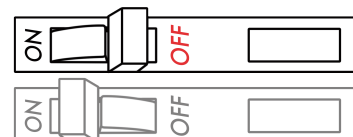

TOOLS REQUIRED


Tools:

1. Sharp Side Cutter
2. Electric Drill
3. Level
4. Measuring Tool
5. Wire Stripper / Knife
6. Philips Screwdrivers
7. Wire Cutters

WIRING



CORD/ SUOOLY WIRING

LUMINAIRE

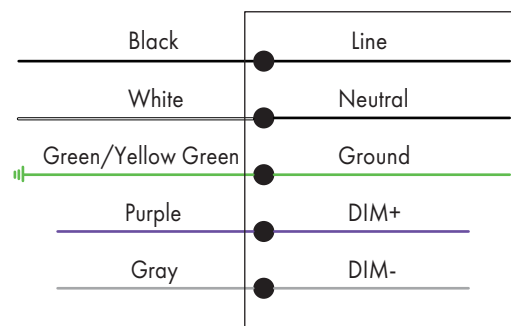

Installation Guide

1. Match the slot of LED engine and trim according to the direction of arrows as shown.
2. Turn clockwise until it is tightened.

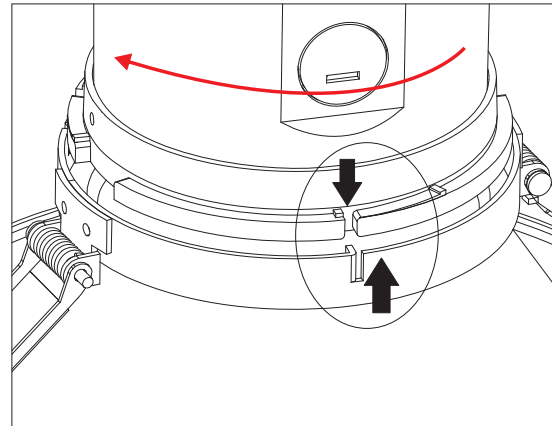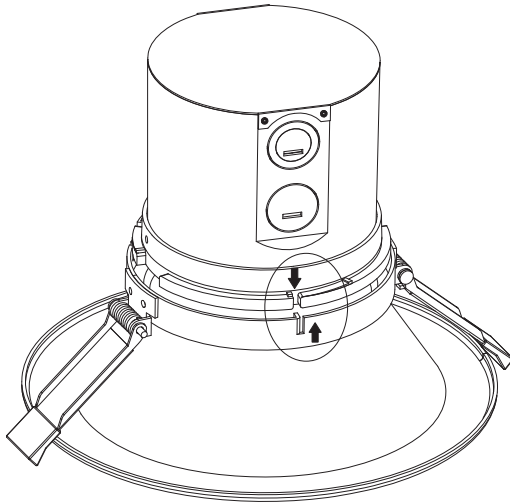

1. Drill hole in the ceiling according to the trim size (See Table 1).
2. Open the cover of LED engine according to the direction of arrow.
3. Remove appropriate knockout(s) for power supply wiring.
4. Bring power supply wires into the junction box using a conduit fitting.
5. Connect the line to the black wire, neutral to the white

wire and ground wire to the green wire with the supplied quick disconnect.

6. Tighten up the spring to mount the LED downlight onto the ceiling, then adjust the position and complete installation 7.

