


LED Full Cutoff Wall Pack Family

Product Features :


The Liron full cutoff wall pack luminaires provide a visually comfortable, varies lumen package, and mounting height flexibility to meet the needs of any projects. It offers two selection and two housing sizes featuring a total of up to 16500 lumen output creating a solution that meets the needs of the over the door lighting to mount heights of up to 20 feet and replacing 70W to 400W metal halide lamps. The Full cutoff wall pack luminaires improve the visual environment of any building and does so with a high energy savings of 80% and low initial cost, making it the choice for wall-mounted lighting upgrades. Optional emergency battery back-up, photocell and motion sensor for security and extra energy saving.

Standard Seires :

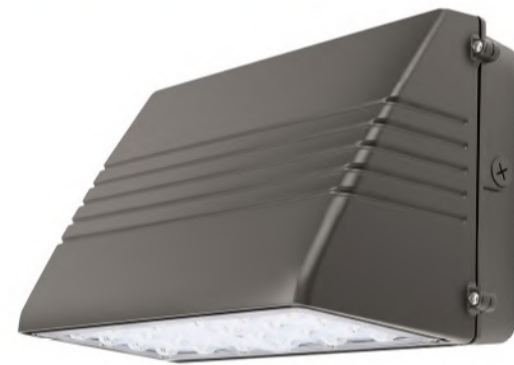

LEDFCUWP

Up to 9750lm
UP to 250WMH

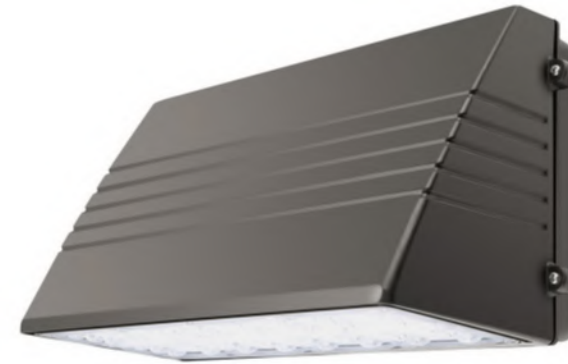

LEDLFCUWP

Up to 18000lm
UP to 400WMH

Premium Series :



LEDPFCUWP

Up to 9500lm
UP to 250WMH



LEDLPFCUWP

Up to 18000lm
UP to 400WMH





- Lumen packages from 3700 to 18000 lumens
- 4000K and 5000K color temperature with 70 CRI
- Tempered UV coated flat lens provide outstanding performance, uniformity and glare control
- Universal 120 – 277 Vac or 347-480Vac
- Standard Non dimmable driver, 1-10V dimming driver available in premium series

Optional Accessories

Button Photocell



Optional factory installed button photocell for added energy savings.

Internal Motion Sensor

(Only available on Premium Wall Pack)



PIR programmable sensor offers greater control and energy savings including adjustable delay and dimming levels.

Internal Battery backup



Battery backup unit feature self diagnostic push to test status indicator and delivers Life safety code average illumination of 1.0 FC.

SERIES	PIR MOTION SENSOR	BATTERY BACKUP	PHOTOCELL	POLYCARBONATE OPTICAL LENS	WARRANTY
LEDFCUWP		✓	✓	✓	5 YEAR WARRANTY
LEDLFCUWP		✓	✓	✓	5 YEAR WARRANTY
LEDPFCUWP	✓	✓	✓	✓	10 YEAR WARRANTY
LEDLPFCUWP	✓	✓	✓	✓	10 YEAR WARRANTY



Performance Data

Standard Series:




Wattage	27W	45W	70W	90W	135W
Voltage	120-277V	120-277/347-480V	120-277/347-480V	120-277/347-480V	120-277/347-480V
Lumen output	3600lm	5100lm	7900lm	10500lm	15550lm
Efficacy	120lm/W	128lm/W	122lm/W	117lm/W	121lm/W
Color Temp.	4000K/5000K	4000K/5000K	4000K/5000K	4000K/5000K	4000K/5000K
Finish Color	Dark Bronzed	Dark Bronzed	Dark Bronzed	Dark Bronzed	Dark Bronzed
Dimming	Non Dimmable	Non Dimmable	Non Dimmable	Non Dimmable	Non Dimmable
THD	≤20	≤20	≤20	≤20	≤20
Power Factor	≥90	≥90	≥90	≥90	≥90
Ambient Operating Temp	-40°F - 104°F	-40°F - 104°F	-40°F - 104°F	-40°F - 104°F	-40°F - 104°F
IP65	YES	YES	YES	YES	YES
DLC	YES	YES	YES	YES	YES
Warranty	5 Year	5 Year	5 Year	5 Year	5 Year
Battery Backup	NO	YES	YES	YES	NO
Photocell	YES	YES	YES	YES	YES
PIR Motion Sensor	NO	NO	NO	NO	NO

Premium Series:




Wattage	27W	45W	70W	90W	135W
Voltage	120-277V	120-277/347-480V	120-277/347-480V	120-277/347-480V	120-277/347-480V
Lumen output	3600lm	5100lm	7900lm	10500lm	15550lm
Efficacy	120lm/W	128lm/W	122lm/W	117lm/W	121lm/W
Color Temp.	4000K/5000K	4000K/5000K	4000K/5000K	4000K/5000K	4000K/5000K
Finish Color	Dark Bronzed	Dark Bronzed	Dark Bronzed	Dark Bronzed	Dark Bronzed
Dimming	1-10V Dimming	1-10V Dimming	1-10V Dimming	1-10V Dimming	1-10V Dimming
THD	≤20	≤20	≤20	≤20	≤20
Power Factor	≥90	≥90	≥90	≥90	≥90
Ambient Operating Temp	-40°F - 104°F	-40°F - 104°F	-40°F - 104°F	-40°F - 104°F	-40°F - 104°F
IP65	YES	YES	YES	YES	YES
DLC	YES	YES	YES	YES	YES
Warranty	10 Year	10 Year	10 Year	10 Year	10 Year
Battery Backup	NO	YES	YES	YES	NO
Photocell	YES	YES	YES	YES	YES
PIR Motion Sensor	YES	YES	YES	YES	YES


Up to
15
Feet

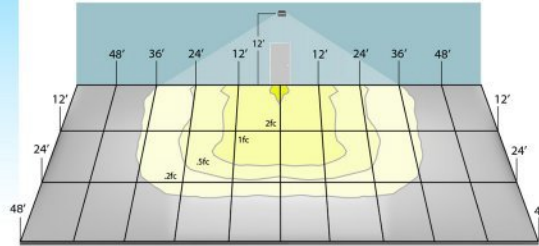

Up to
20
Feet

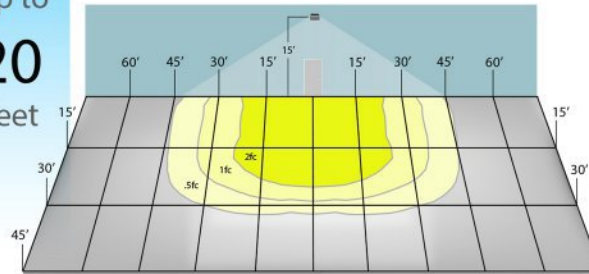

Up to
25
Feet

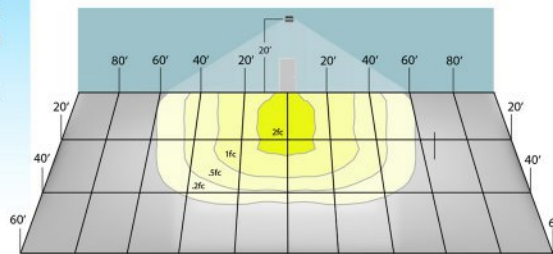



© 2021 Liron Lighting. All rights reserved. The information provided herein is subject to change, without notice. Liron does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Liron. All trademarks are owned by Liron Lighting or their respective owners. All rights reserved

Address : 10835 S Wilcrest Dr., Ste C
Houston TX 77099
Email : Sales@lironlighting.com
Customer service : 833-875-4766
Website : www.lironlighting.com