Accessory

Code	H	V	Q	R	S	T	U	Y
Picture								
Name	Wire Nut	Screw	Square Plate	Screw	Screw	Anchor	Wall Mounting Bracket	Male Quick Connector (5 Holes)

Step 1 Install mounting point on wall

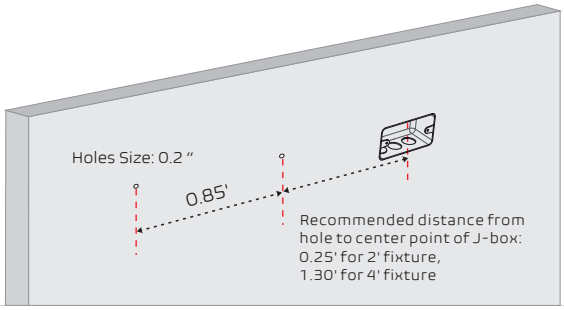

Step 2 Install plate and bracket

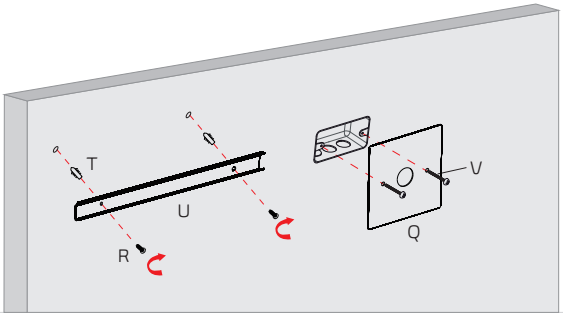

2-1: Insert Anchor "T" into hole and fix the Wall Mounting Bracket" U" with screw "R".
2-2: Mount the square cover plate "Q" onto J-box with screw "V".

Step 3 Wiring

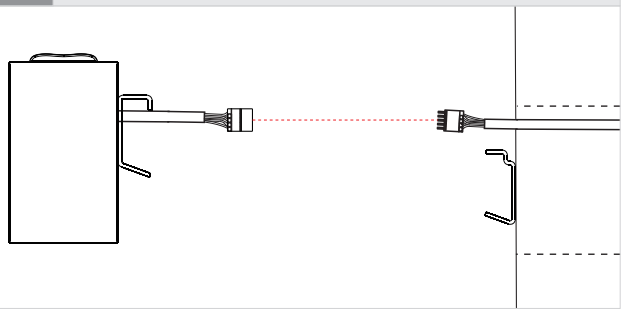

3-1: Plug in AC wires, dimming wires and ground wire into the male quick connector (5 holes) "Y " according to label instructions.
3-2: Plug in the male and female connector together, hide all wires into the junction box.

Step 4 Mounting

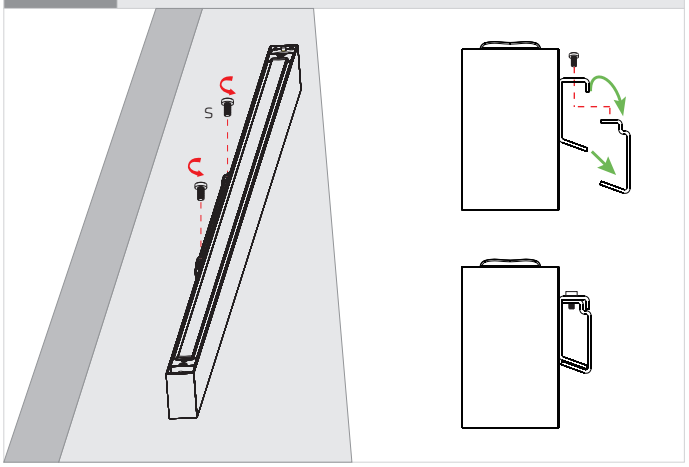

Match the hole position of the fixture and "wall mounting bracket", and mount the fixture onto wall with screw "S".

Step 5 Complete

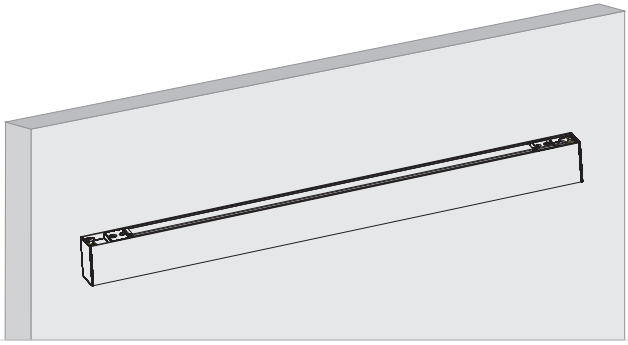

All rights reserved. Due to continuous product improvements, specifi cations and dimensions are subject to change without notice.

Accessory

Code	H	V	Q	R	S	T	U	V	Y
Picture									
Name	Wire Nut	Screw	Square Plate	Screw	Screw	Anchor	Wall Mounting Bracket	"—" Joiner	Male Quick Connector (5 Holes)

Pre-installation

Disassemble luminaires as shown below

Start of run (SoR): Remove the end cap without power code, insert the joiner and fix it with screw.

Middle of run (MoR): Remove both end caps, insert the joiner and fix it with screw.

End of run (EoR): Remove the end cap with power code, insert the joiner and fix it with screw.

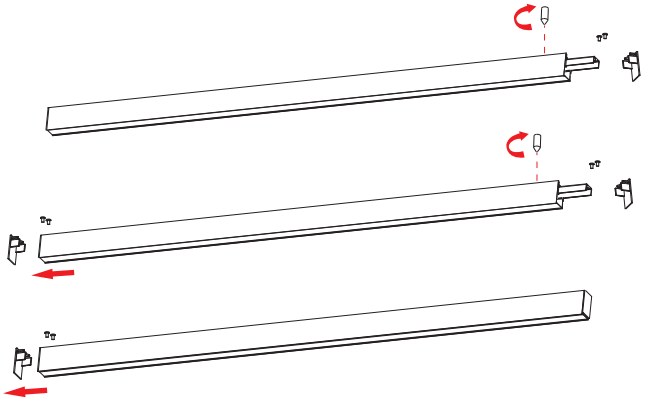

Step 1

Install mounting point on wall

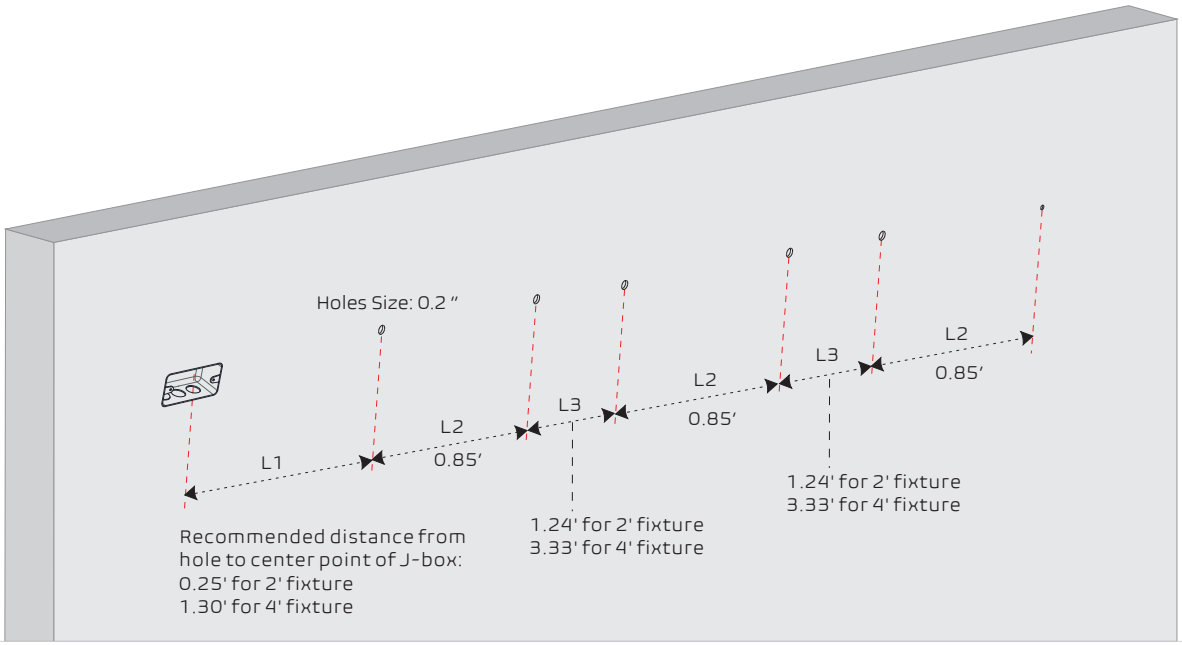

All rights reserved. Due to continuous product improvements, specifi cations and dimensions are subject to change without notice.

Step 2 Install plate and bracket from SoR to EoR

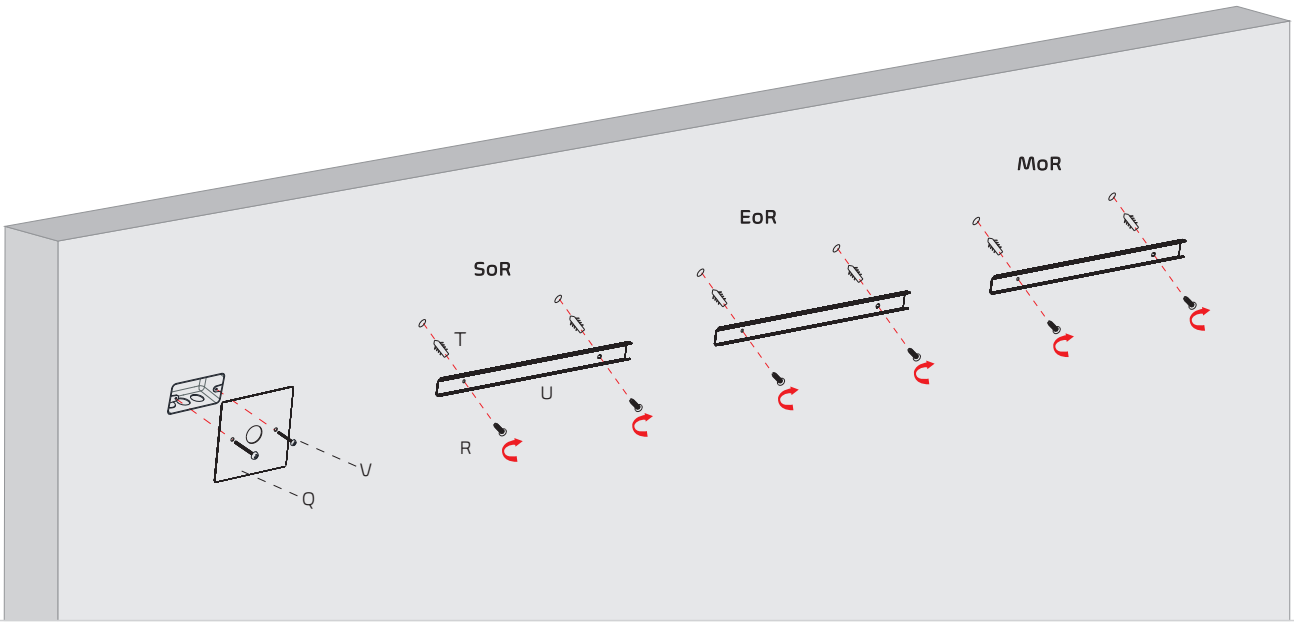

Step 3 Wiring – SoR

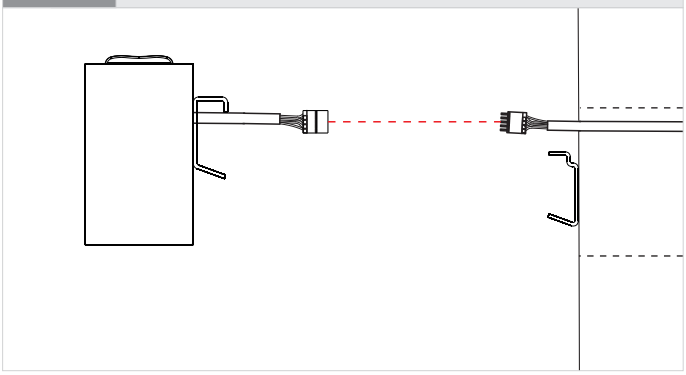

3-1: Plug in AC wires, dimming wires and ground wire into the male quick connector (5 holes) "Y " according to label instructions.
3-2: Plug in the male and female connector together, hide all wires into the junction box.

Step 4 Mounting

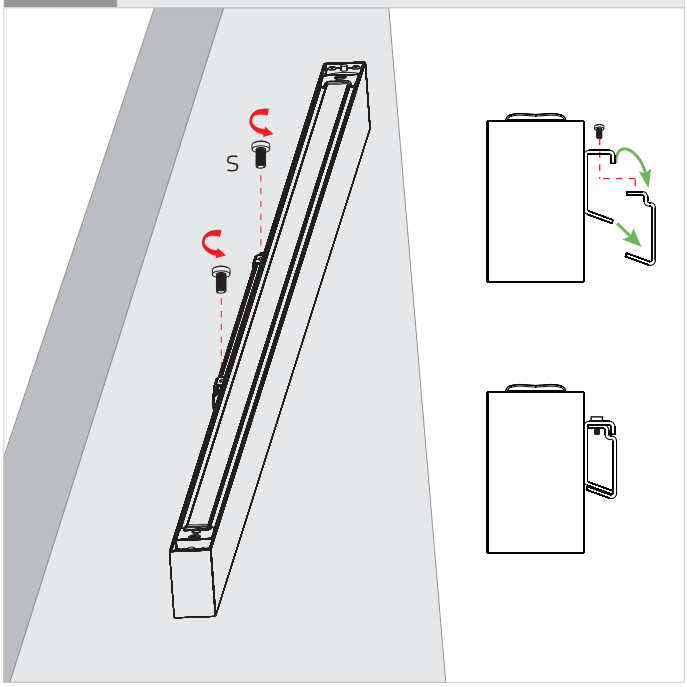

Match the hole position of the fixture and "wall mounting bracket", and mount the fixture onto wall with screw "S".

All rights reserved. Due to continuous product improvements, specifi cations and dimensions are subject to change without notice.

Step 5 Repeat install and Join steps – MoR to EoR



Connect the quick connectors properly

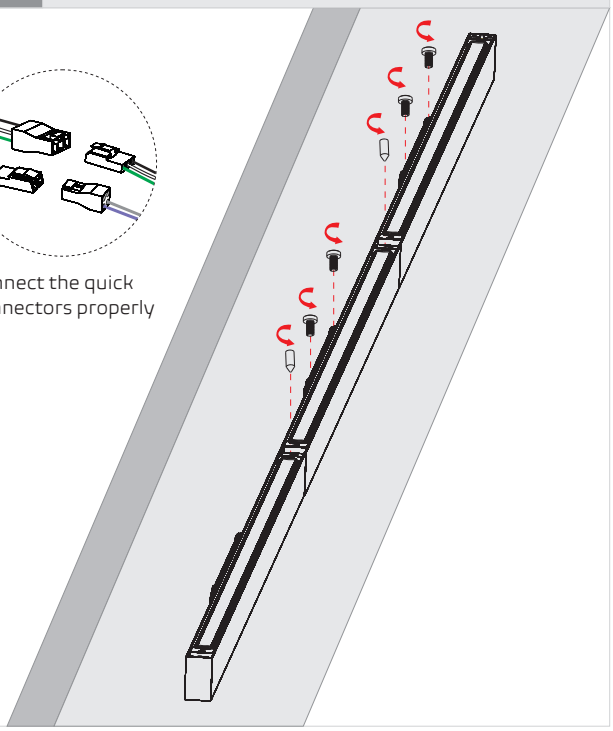

Step 6 Complete

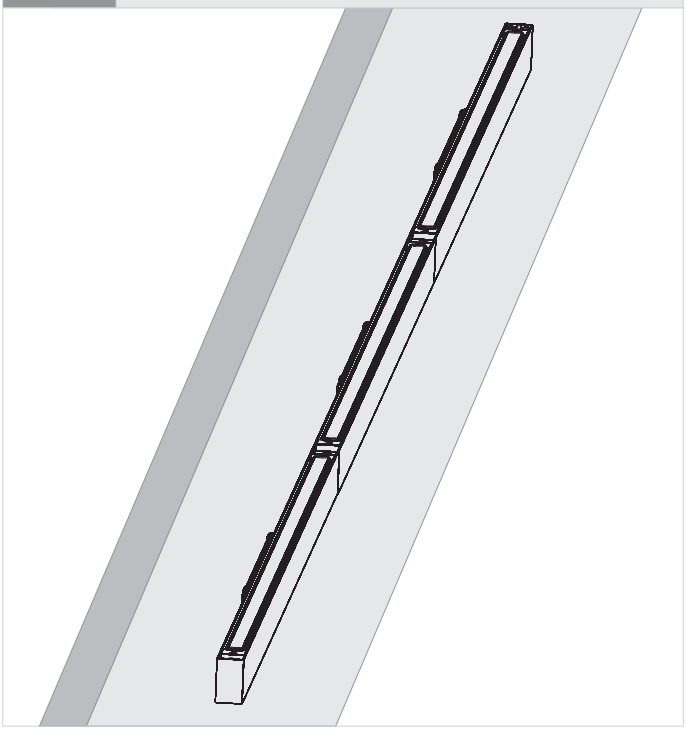

42' Diffuser Lens Roll

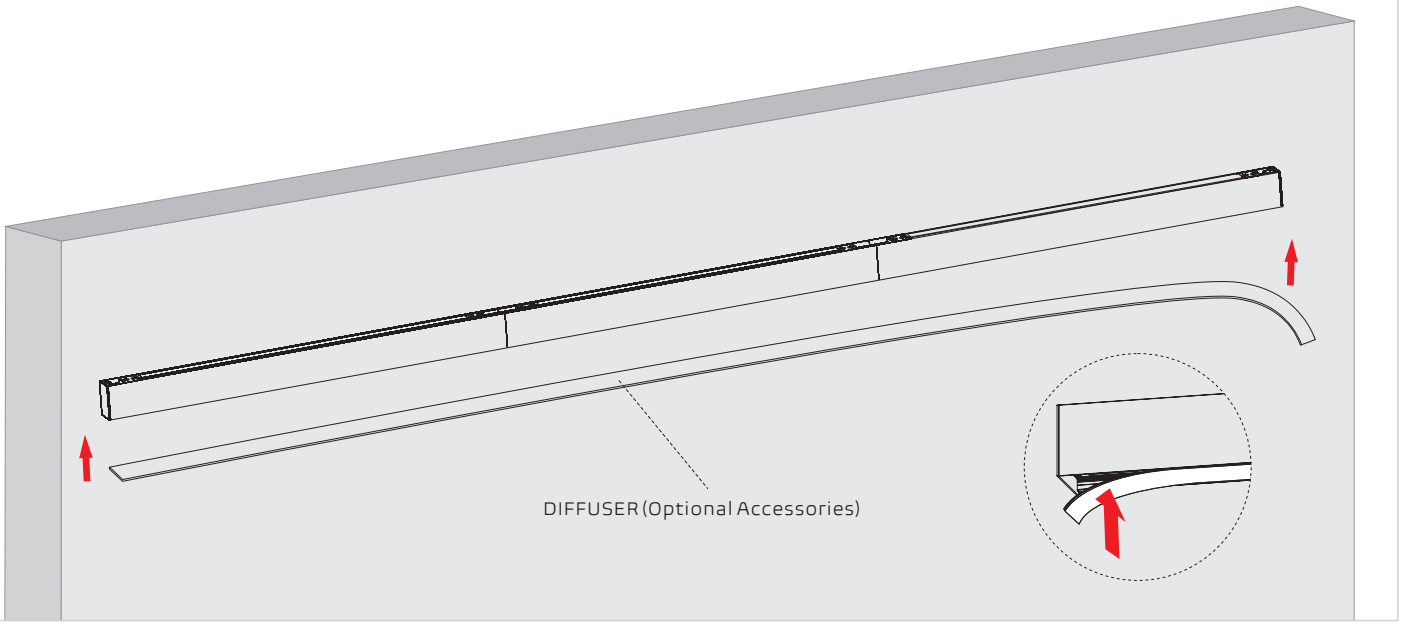

All rights reserved. Due to continuous product improvements, specifi cations and dimensions are subject to change without notice.