

BL-PIR SERIES External PIR Motion Sensor

Fixture Type:

Project Name:

Location:

Date:

Features

- Provides line voltage On/Off switching and 0-10VDC dimming control
- Works with ballasts or LED drivers
- High and low modes fully adjustable from 0-10V
- Time delay from 10 seconds to 60 minutes
- Optional cutoff delay
- All control parameters are adjustable by DIP switch or wireless controller




Product Performance Standard

Power Supply	120-277Vac 50/60Hz	Dim control output	0-10V 25mA
Detection Radius	30ft@40ft height/360°	Mounting Height	Max 40ft
Remote Range	50ft, no backlight	Time Setting	10 sec to 60 min adjustable
Light Control	10-2000Lux adjustable	Humidity	Max.95%RH
Temperature	-40°F to 167°F(-40°C - 75°C)		

Ordering Guide


Example : BL-PIR/DIP-EX

Dimensions

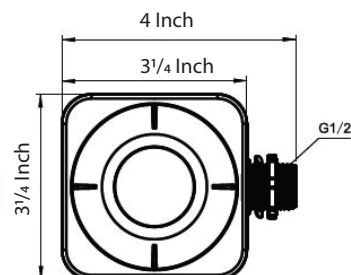

Coverage

L2 Lens

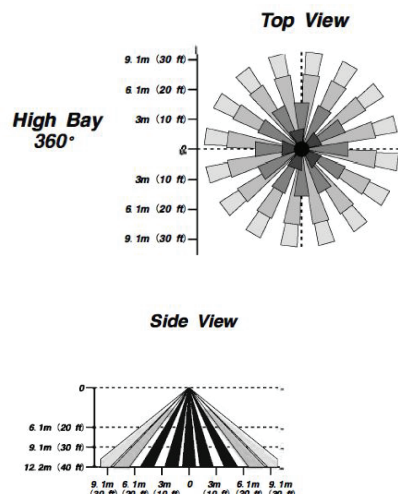

Fixture Type

Description

BL-PIR/DIP-EX

PIR Motion Sensor, External Install,DIP Switch 0-10V,1 120-277Vac

Fixture Type:

Project Name:

Location:

Date:

Wiring Diagram

