

# BL-PIR SERIES Internal PIR Motion Sensor

**Fixture Type:**

**Project Name:**

**Location:**


**Date:**

## Features

- Provides line voltage On/Off switching and 0-10VDC dimming control
- Works with ballasts or LED drivers
- High and low modes fully adjustable from 0-10V
- Time delay from 10 seconds to 60 minutes
- Optional cutoff delay
- All control parameters are adjustable by DIP switch or wireless controller




## Dimensions

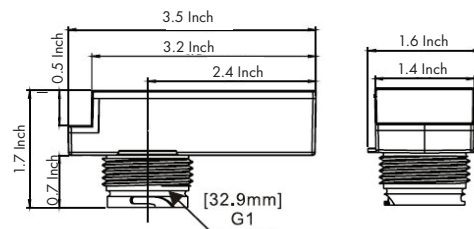


## Coverage

**L3**

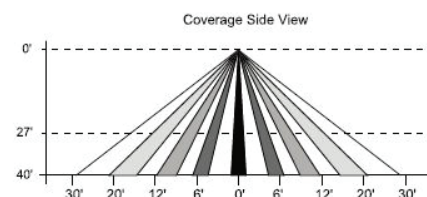

**360° Coverage**



## Product Performance Standard

<b>Power Supply</b>	120-277Vac 50/60Hz	<b>Dim control output</b>	0-10V 25mA
<b>Detection Area</b>	360°	<b>Mounting Height</b>	Max 40ft
<b>Remote Range</b>	50ft, no backlight	<b>Time Setting</b>	10 sec to 60 min adjustable
<b>Light Control</b>	10-2000Lux adjustable	<b>Humidity</b>	Max.95%RH
<b>Temperature</b>	-40°F to 167°F(-40°C - 75°C)		

## Ordering Guide

Exmple : BL-PIR/DIP-W-EX

Fixture Type

Description

BL-PIR-INT

Wet Location, PIR Motion Sensor, Internal Install,DIP Switch 0-10V, 120-277Vac



## BL-PIR SERIES Internal PIR Motion Sensor

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

### Wiring Diagram

