

# PPST SERIES

FIXTURE TYPE:  
PROJECT NAME:  
LOCATION:  
DATE:


## Traditional Lantern Post Top



with photocell



## Specification

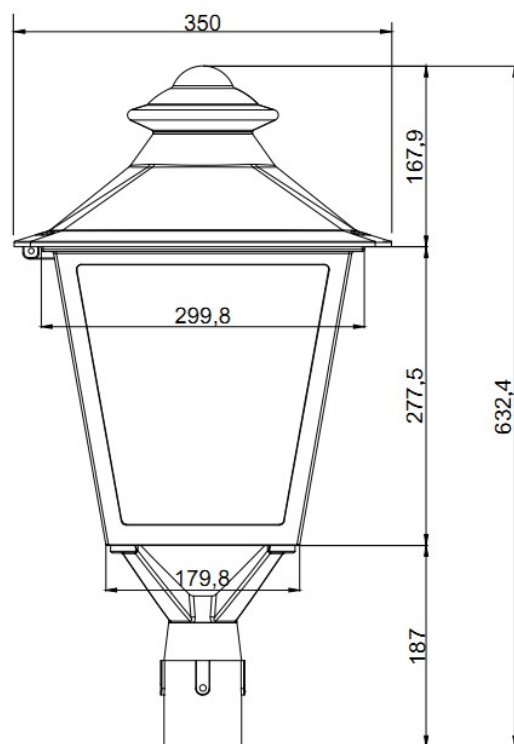

|                                      |                                 |
|--------------------------------------|---------------------------------|
| <b>Housing</b>                       | Aluminum housing                |
| <b>Lens</b>                          | Frosted Glass Lens              |
| <b>Beam angle</b>                    | TYPE V Distribution             |
| <b>Color Temp</b>                    | 3CCT 3000K/4000K/5000K          |
| <b>CRI</b>                           | 70 CRI                          |
| <b>Input Voltage</b>                 | 100-277V                        |
| <b>Installation</b>                  | Fit 3 inch or 2-3/8" pole mount |
| <b>Efficacy</b>                      | 110lm/W                         |
| <b>LED Life Span</b>                 | 50,000 hrs                      |
| <b>Dimmable</b>                      | 0-10V Dimmable                  |
| <b>Lumen Package</b>                 | 3,300 lm to 13,200lm            |
| <b>Warranty</b>                      | 5 Year                          |
| <b>Ambient Operation Temperature</b> | -40°C to 45°C                   |
| <b>Listing</b>                       | UL Listed IP65 DLC              |

# PPST SERIES

FIXTURE TYPE:  
 PROJECT NAME:  
 LOCATION:  
 DATE:

## Traditional Lantern Post Top

### Features

- Aluminum housing with black coat finish.
- Frosted glass lens.
- Single wattage for 30W option, Wattage selectable 60W/50W/30W,100W/60W/30W,120W/100W/80W
- 3CCT color temperature adjustable 3000K/4000K/5000K.
- Universal 100-277V input voltage,0-10V dimmable driver dim down to 10%.
- It fit with standard 3" round pole or 2-3/8" tenon top.
- Optional motion sensor and photocell accessories available for enhanced energy savings.

### Ordering Guide

Example: LEDPPST60W3CCT-MS

#### SKU



LEDPPST

#### Wattage



30W  
 60W  
 100W  
 120W

#### CCT



3CCT  
 =Color Temp. Adjustable  
 3500K/4000K/5000K

#### Optional Accessories

##### Sensor



MS  
 =3.5mm PIR plug and play  
 motion sensor

##### Photocell



ALPC  
 =3 PIN Photocell

# PPST SERIES

FIXTURE TYPE:  
 PROJECT NAME:  
 LOCATION:  
 DATE:

## Traditional Lantern Post Top

### Product Data

|         | 3000K   |          | 4000K   |          | 5000K   |          |
|---------|---------|----------|---------|----------|---------|----------|
| WATTAGE | LUMEN   | EFFICACY | LUMEN   | EFFICACY | LUMEN   | EFFICACY |
| 30W     | 3,150lm | 105lm/W  | 3,300lm | 110lm/W  | 3,300lm | 110lm/W  |


|         | 3000K   |          | 4000K   |          | 5000K   |          |
|---------|---------|----------|---------|----------|---------|----------|
| WATTAGE | LUMEN   | EFFICACY | LUMEN   | EFFICACY | LUMEN   | EFFICACY |
| 60W     | 6,300lm | 105 lm/W | 6,600lm | 110lm/W  | 6,600lm | 110 lm/W |
| 50W     | 5,250lm | 105 lm/W | 5,500lm | 110lm/W  | 5,500lm | 110 lm/W |
| 30W     | 3,150lm | 105 lm/W | 3,300lm | 110lm/W  | 3,300lm | 110 lm/W |

|         | 3000K    |          | 4000K    |          | 5000K    |          |
|---------|----------|----------|----------|----------|----------|----------|
| WATTAGE | LUMEN    | EFFICACY | LUMEN    | EFFICACY | LUMEN    | EFFICACY |
| 100W    | 10,500lm | 105 lm/W | 11,000lm | 110lm/W  | 11,000lm | 110 lm/W |
| 60W     | 6,300lm  | 105 lm/W | 6,600lm  | 110lm/W  | 6,600lm  | 110 lm/W |
| 30W     | 3,150lm  | 105 lm/W | 3,300lm  | 110lm/W  | 3,300lm  | 110 lm/W |

|         | 3000K    |          | 4000K    |          | 5000K    |          |
|---------|----------|----------|----------|----------|----------|----------|
| WATTAGE | LUMEN    | EFFICACY | LUMEN    | EFFICACY | LUMEN    | EFFICACY |
| 120W    | 12,600lm | 105 lm/W | 13,200lm | 110lm/W  | 13,200lm | 110 lm/W |
| 100W    | 10,500lm | 105 lm/W | 11,000lm | 110lm/W  | 11,000lm | 110 lm/W |
| 80W     | 8,400lm  | 105 lm/W | 8,800lm  | 110lm/W  | 8,800lm  | 110 lm/W |

# PPST SERIES

## CCT Select & Power Select

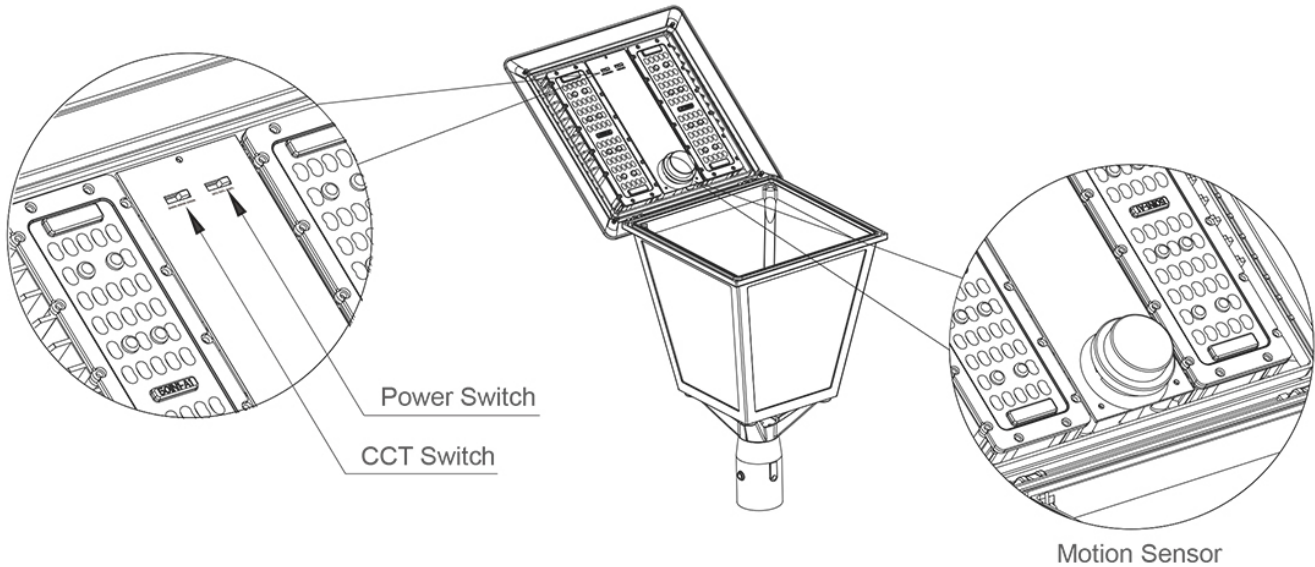

## Extra Functions Available

