


WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power to the luminaire and wait until the fixture cool down.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.
6. This luminaire is designed to operate in ambient temperatures ranging from -40° c to 40° c and to be horizontally mounted with the LEDs facing down
7. This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.

SHOCK HAZARD!



Turn power OFF at circuit breaker prior to installation or servicing.




TOOLS REQUIRED

Tools:

1. Sharp Side Cutter
2. Electric Drill
3. Level
4. Measuring Tool
5. Wire Stripper / Knife
6. Philips Screwdrivers
7. Wire Cutters


WIRING

CORD/ SUPPLY WIRING

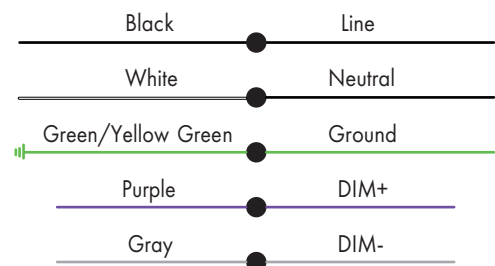


1. Surface Mounting

1. Loosen the screw to take off the mounting plate from the fixture.
2. Screw the mounting plate to the ceiling.
3. Hang the lamp on the ring so as to connect wires with terminal caps.
4. Hook up fixture on the mounting plate.
5. Secure the screw. Installation Completed.

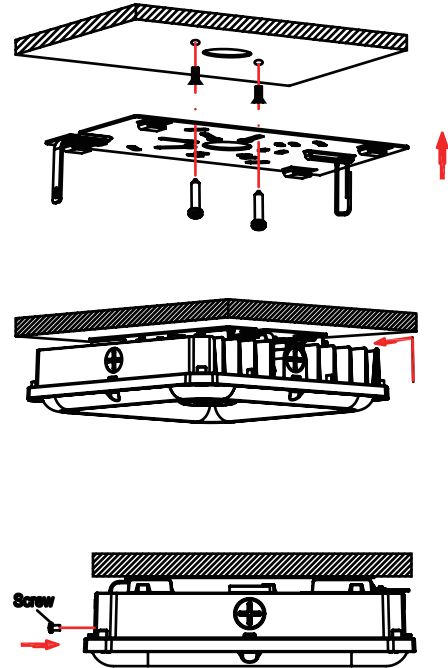

2. Pendant Mounting

1. Connecting wires with terminal caps.
2. Rotating the steeve to make it fixed with the fixture.

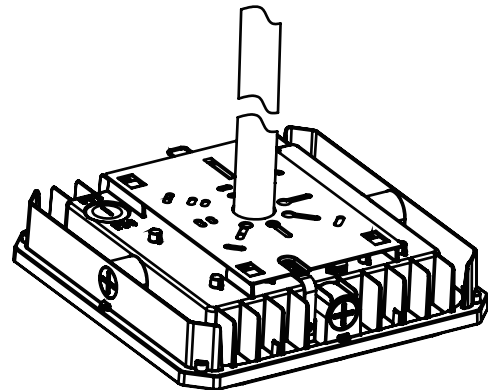

Internal Power and 3CCT Selectable switch

1. Loosen the M25 screws on the side of the fixture, open the front cover of the housing, and adjust the DIP switch to the corresponding color temperature and power in the actual application requirement.

