

Fixture Type:

Project Name:

Location:


Date:

Features

- Rugged aluminum housing with integral heat sink fins to aid in thermal transfer of the electrical component
- Double arm style
- Top diameter limited to 2-3/8" or 3" for install on poles mount
- 8-20 feet mounting height
- 1-10V dimming driver
- Compatible with motion sensor and photocell



Dimension

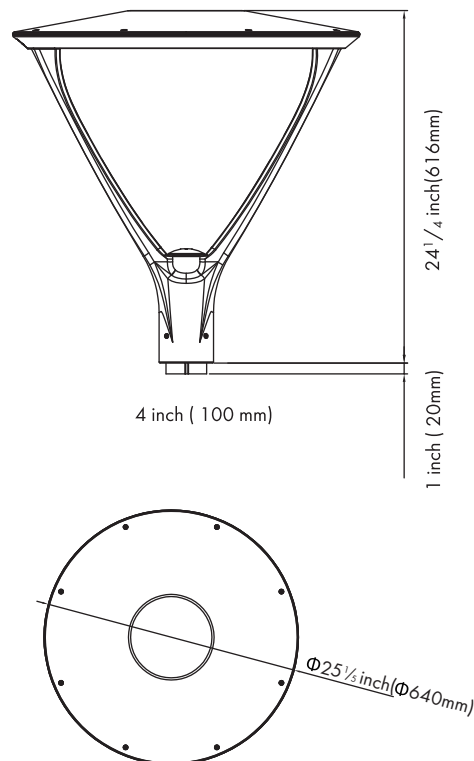

Product Performance Standard

Size	24 ¹ / ₄ " L x 4"W	Power Factor	≥90%
Weight	25 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	1 - 10V Dimming
Color Temp	4000K-5000K	THD	<20%
CRI	70	Warranty	5 Years
Input Voltage	120-277V/347-480V	Ambient Operation Temperature	-40C° (-40°F) ~40C° (104°F)

Ordering Guide Example: LED2PST 45W 50K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Optional Accessories
LED2PST	45 W	40K=4000K	Blank = 120-277V	Blank = Dark Bronzed	Blank = No Accessories
	70 W	50K=5000K	*HV = 347 -480V	BK = Black	PC = Photocell (-WPPC)
	87 W			WH = White	MS = Motion Sensor (-BL-PIR-INT)
	130W				

Note: *Only 130W compatible with 347-480V.



Fixture Type:

Project Name:

Location:

Date:

Product Information

		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	
45W	5400lm	120lm/W	5500lm	130lm/W	
70W	8400lm	120lm/W	8500lm	130lm/W	
87W	10500lm	121lm/W	10600lm	122lm/W	
130W	15600lm	120lm/W	15800lm	122lm/W	

Optional Accessories



Photocell Included

-SKU: ALPC

-3 PIN twist lock photocell is field installed or pre-installed by request.



PIR - Motion Sensor

-SKU: BL-PIR-INT

-Internal PIR Motion Sensor is field installed or pre-installed by request.

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories

Fixture Type:

Project Name:


Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

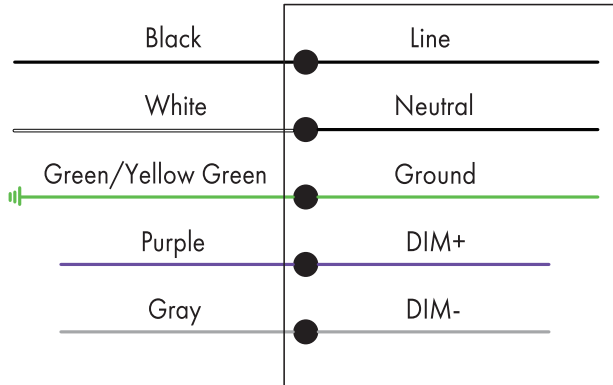

Scan the QR code or visit www.lironlighting.com/products/led2pst for the complete luminaire installation guide.

Note:

