

WARNING

PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

To avoid electric shock or component damage disconnect power before attempting installation or servicing.

This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local

Disconnect product and allow cooling prior to servicing.

Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.

To prevent product malfunction and/or electrical shock this product must be properly grounded.


This luminaire is designed to operate in ambient temperatures ranging from -40°C to 40°C and to be horizontally mounted with th

This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor

SHOCK HAZARD!



To avoid electric shock or component damage disconnect power before attempting installation or servicing.

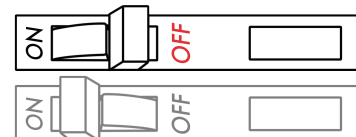

TOOLS REQUIRED


Tools:

1. Sharp Side Cutter
2. Electric Drill
3. Level
4. Measuring Tool
5. Wire Stripper / Knife
6. Philips Screwdrivers
7. Wire Cutters

WIRING

CORD/ SUOOLY WIRING


LUMINAIRE

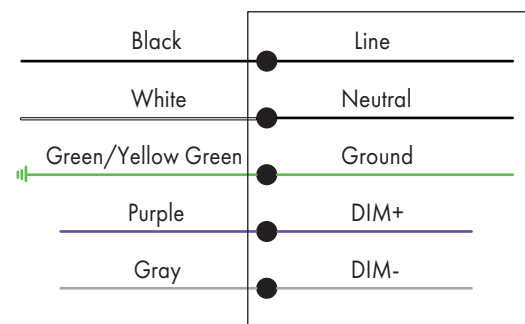


Installation Guide

1. Different lumen and correlated color temperature levels can be achieved by setting the switch on the driver cover to different positions.


For 38W product: 2750lm-3300lm-4400lm
For 48W product: 3300lm-4400lm-5500lm

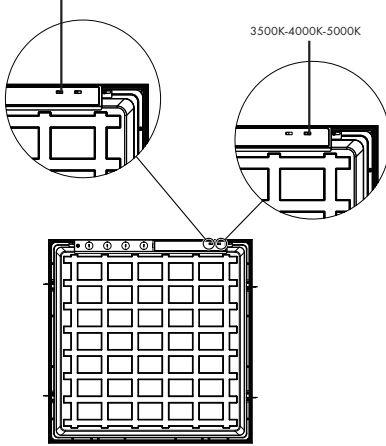

2. Raise unit into ceiling.

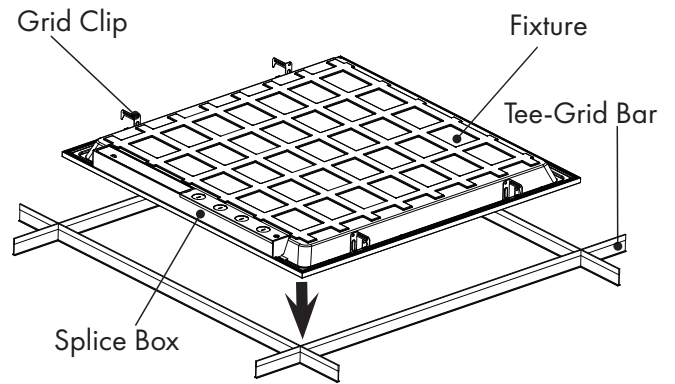

3. Open access plate. Use knockouts to connect power using appropriately sized electrical fittings. Make wiring connections.

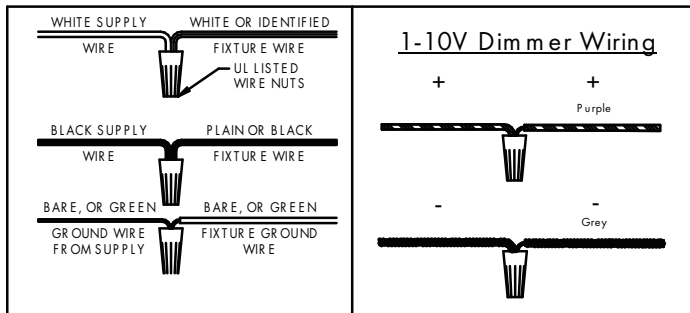

4. Bend T-bar clips into position. Support the fixture to the building structure by support wires (supplied by others) through the grid clip hole.

