


13Inch Flush Mount Panel

Installation Instructions

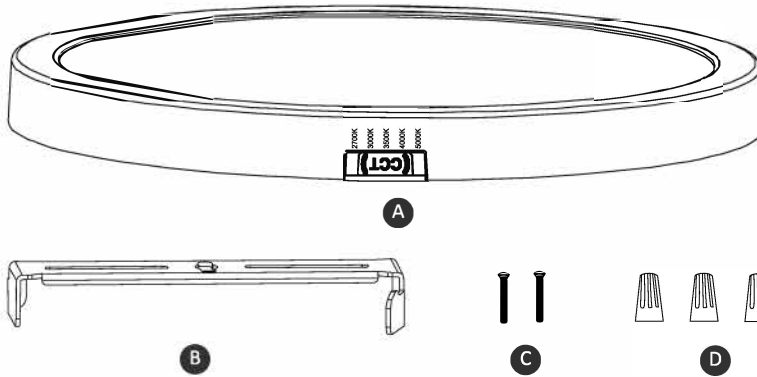

PACKAGE CONTENTS

PART	DESCRIPTION	QUANTITY
A	13Inch Flush Mount Panel	1
B	Mounting Bracket	1
C	Screws	2
D	Wire Nuts	3

DIMMER RECOMMENDATION

This unit may operate on other dimmers we haven't tested with. (Input 120V 60Hz)

LEVITON	6672, RNL06, IPL06, DSL06, 6674, VPI06-1LZ
LUTRON	GT-600P, DVCL-153P, TGCL-153PH-LA, MSCL-OP153M, SLV-600P-AL, PD-6WCL DV-600PR-WH, MACL-153M//MA-R, SCL-153PH-WH, CTCL-153PDH-WH, TG-600PR-WH, S-600PR-WH

UNPACKING

Thoroughly inspect the fixture for freight damage. Freight damage should be reported to the carrier.

IMPORTANT

Please read carefully and save these instruction, as you may need them at a later date. When using electrical equipment, basic safety precautions should always be followed as below:

READ AND FOLLOW BELOW SAFETY INSTRUCTIONS

GENERAL: All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with connections obtain the services of a qualified electrician.

WARNING

- Risk of fire or electric shock.
- Disconnect main power at fuse or circuit breaker before installing or servicing the fixture.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit Installation.
- To prevent wiring damage or abrasion do not expose wiring to edges of sheet metal or other sharp objects.
- This device is not intended for use with emergency exit.
- This fixture is 5%-100% dimmable. Please refer to a compatible dimmer list.
- Suitable for Wet Locations.
- To prevent electrical shock, please wear rubber shoes and work gloves when installing the fixture.

FLUSH MOUNT

- 1.** Make sure power is OFF and the J-BOX is securely mounted before installing the fixture, see Fig1.
- 2.** Rotate the bracket to remove the mounting bracket from the unit, see Figure 2.
- 3.** Refer to the hole position on the bracket and do the matching, Hold Mounting Bracket up to junction box. Screws mounting bracket to j-box, see Fig3.
- 4.** Push the switch to select the correct color temperature, see Fig4.
- 5.** Connect the power wires with the wires of the fixture correctly by using the wire nuts. Attach white to white, black to black, green to the ground wire, see Fig5.
- 6.** After installing the mounting bracket, push the product in the direction of the mounting bracket hole position, see Fig6.

