

Fixture Type:

Project Name:

Location:

Date:

Features




- Low profile, rugged die-cast aluminum housing
- Dark bronze powder coat finish
- UV stabilized polycarbonate optical lens
- Standard surface mount or J box mount
- 3/4" pendant mount available as an option



Product Performance Standard

Size	9 1/2" X 9 1/2" X 3 1/4"	Power Factor	≥90%
Weight	4 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	Non Dimmable
Color Temp	4000K-5000K	Photometry	Parking Garage
CRI	70	Warranty	5 Years
Input Voltage	120-277V/347-480V	Ambient Operation Temperature	-40C° (-40°F) ~45C° (113°F)

Dimension

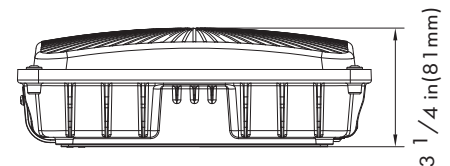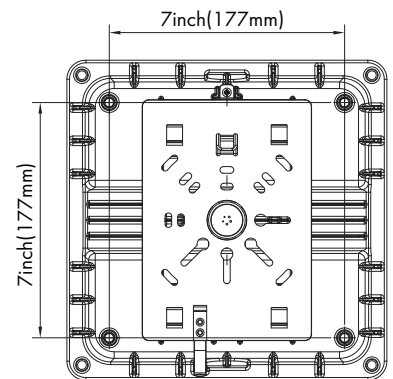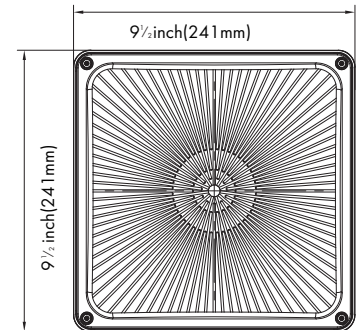

Ordering Guide

Example: LEDCNP 27W 40K

Fixture Type	Wattage	Color Temp.	Voltage	² Finish
LEDCNP	27W	40K=4000K	Blank = 120-277V	Blank = Dark Bronze
	40W	50K=5000K	¹ HV = 347-480V	BK = Black
	60W			WH = White

Note: 1. 27W is not compatible with 347-480V input voltage.
2. Other finish color, consult factory for availability.



CNP Series Square Canopy

Fixture Type:

Project Name:

Location:

Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
27W	3750lm	130lm/W	3800lm	130lm/W
40W	5350lm	139lm/W	5450lm	141lm/W
60W	7800lm	134lm/W	8000lm	136lm/W



Fixture Type:

Project Name:


Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

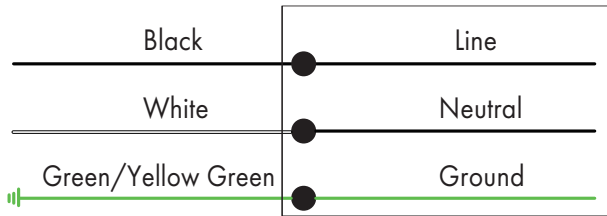

Scan the QR code or visit www.lironlighting.com/product/ledcnp for the complete luminaire installation guide.

Note:
