

**LEDDTD** 





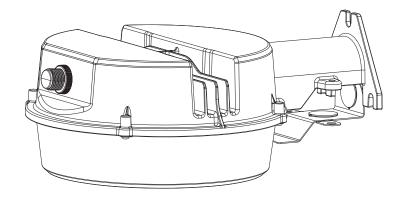


- 1. Turn power off before inspection, installation or removal.
- 2. The installation should be performed by qualified electricians or lighting technicians.
- Before conducting any installation, maintenance, or removal, disable all power to the luminaries and wait until the fixture cool down.
- 4. Do not touch the fixture while it is in service.
- 5. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.
- 6. This luminaire is designed to operate in ambient temperatures ranging from -40° c + 45° c and to be horizontally mounted with the LEDs facing down.
- 7.This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.

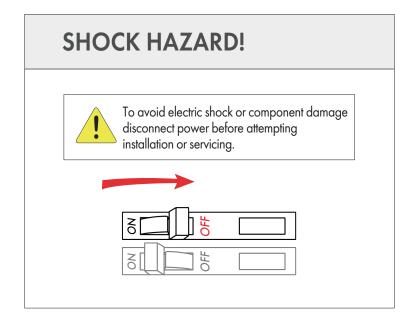

## **TOOLS REQUIRED**

## Tools:

- 1. Sharp Side Cutter
- 2. Electric Drill
- 3. Level
- 4. Measuring Tool
- 5. Wire Stripper / Knife
- 6. Philips Screwdrivers
- 7. Wire Cutters

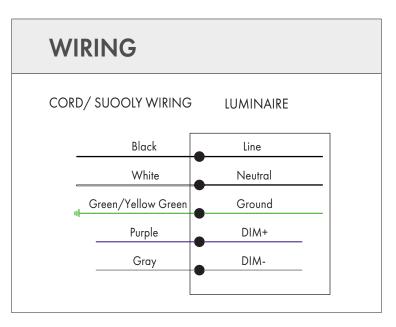








## Installation Guide

1. Place mounting section of fixture onto desired mounting surface, mark and drill holes for mounting. Mount the fixture with bolts provided. Install the two bottom screws first. Place the fixture on the two bottom screws and install the top screw.

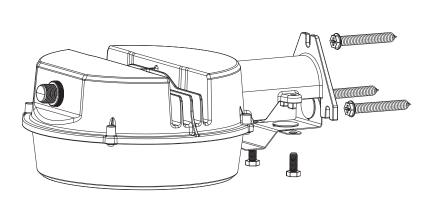

## Arm mounting

Feed supply wires through arm and make wiring connections.
(White to Neutral lead, Black to Line lead, Yellow Green to Ground lead)

