

LS Series Landscape Flood Light

Fixture Type:




Project Name:

Location:

Date:

Features

- Rugged aluminum housing with UV resistant dark bronze powder coat finish
- 25° / 40° / 60° optical distribution options for different purpose use
- Adjustable swivel for easy aiming
- Optional 8" Ground stake mount

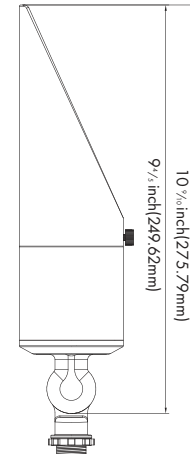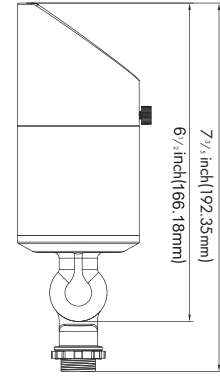

Product Performance Standard

Size	9 4/5" LX 2 1/2" W	Power Factor	90%
Weight	12 lb	LED lifespan	50,000 Hrs
IPRATE	IP65	Dimmable	Non Dimmable
Color Temp	2700K-3000K-4000K-5000K	Beam Angle	25° / 40° / 60°
CRI	80	Warranty	5 Years
Input Voltage	12V	Ambient Operation Temperature	-45C° (-50°F) ~40C° (104°F)

Ordering Guide

Example: LEDLS 6W40K

Fixture type	Wattage	Color Temp.	Voltage	Finish	Cowl	Beam Angle
*LEDLS	6W 10W	27K=2700K 30K=3000K 40K=4000K 50K=5000K	Blank = 12V	Blank = Dark Bronze BK = Black WH = White	Blank = Long Cowl Short Cowl	Blank = 60 Degree 25 = 25 Degree 40 = 40 Degree

*Limited quantity in stock, customize options are made to order, please contact Liron Lighting for more detail.



LS Series Landscape Flood Light

Fixture Type:

Project Name:

Location:

Date:

Product Information

2700K			3000K	
WATTAGE	LUMEN	COWL	LUMEN	COWL
6W	480lm	Short Cowl	480lm	Short Cowl
6W	350lm	Long Cowl	350lm	Long Cowl
10W	600lm	Short Cowl	600lm	Short Cowl
10W	440lm	Long Cowl	440lm	Long Cowl

Optional Accessories



Ground Stake

-SKU: Ground Stake





LS Series Landscape Flood Light

Fixture Type:

Project Name:


Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

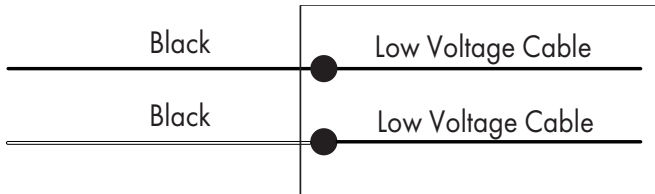

Scan the QR code or visit
www.lironlighting.com/ledls
for the complete luminaire installation guide.

Note:

