

WARNING


PLEASE READ ALL INSTRUCTIONS BEFORE ATTEMPTING INSTALLATION

To prevent personal injury or product damage only licensed electricians should install.
To avoid electric shock or component damage disconnect power before attempting installation or servicing.
This product must be installed in accordance with the national electric code (NEC) and all applicable federal, state and local electric codes and safety standards.
Disconnect product and allow cooling prior to servicing.
Any alteration or modification of this product is expressly forbidden as it may cause serious personal injury, death, property damage and/or product malfunction.
To prevent product malfunction and/or electrical shock this product must be properly grounded.
This luminaire is designed to operate in ambient temperatures ranging from -40°C to 45°C and to be horizontally mounted with the LEDs facing down.
Wall mount only. — This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.

SHOCK HAZARD!



To avoid electric shock or component damage disconnect power before attempting installation or servicing.

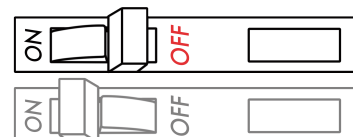

TOOLS REQUIRED


Tools:

1. Sharp Side Cutter
2. Electric Drill
3. Level
4. Measuring Tool
5. Wire Stripper / Knife
6. Philips Screwdrivers
7. Wire Cutters

WIRING


CORD/ SUOOLY WIRING

LUMINAIRE

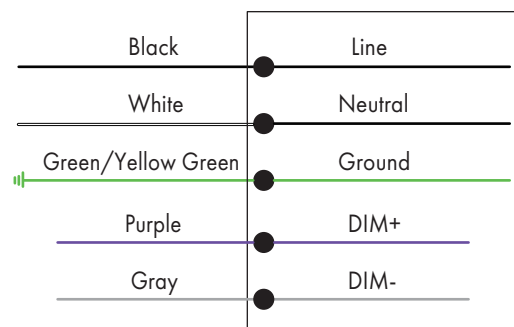

Junction Box Mounting

1. Loosen screws and remove the front lens set carefully from the back plate.
2. Drill appropriate knockouts (B) for wiring, the fixture supports standard 3 1/4" and 4" Junction box.
3. Attach the back plate on the wall, use the supplied gaskets for a weather tight seal.
4. Finish wiring (Black for Line, White for Neutral and Yellow Green for Ground).
5. Replace the lens set on the hinges, make connections and close the lens set then tighten the screws.

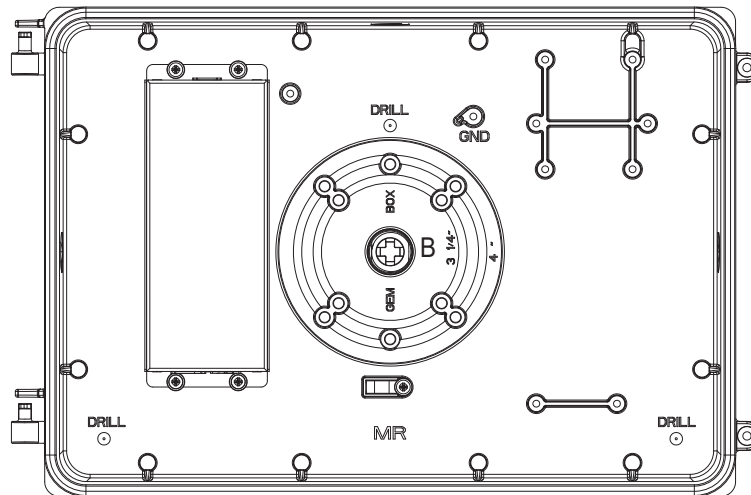

Conduit Mounting

1. Loosen screws and remove the front lens set carefully from the back plate.
2. Remove 1/2" plug from where you intend to feed conduit.
3. Drilling out the holes (C) to secure it on the wall with choosing proper screws.
4. Finish wiring (Black for Line, White for Neutral and Yellow Green for Ground).
5. Replace the lens set on the hinges, make connections and close the lens set then tighten the screws.

