

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Features



- 4" / 6" aluminum recessed downlight
- CCT adjustable 3000K/4000K/5000K
- Architectural white finish
- Baffle recessed lighting trim
- Triac dimming
- E26 adaptor included
- New construction or retrofit application



## Product Performance Standard

<b>Size</b>	4Inch / 6 Inch	<b>Power Factor</b>	°90%
<b>Weight</b>	2 lb	<b>LED lifespan</b>	50,000 Hrs
<b>Color Temp</b>	3CCT	<b>Dimmable</b>	Triac Dimming
<b>CRI</b>	80	<b>Energy Star</b>	YES
<b>Input Voltage</b>	120V	<b>Warranty</b>	5 Years
<b>Mounting</b>	Recessed	<b>Ambient Operation Temperature</b>	0C° (32°F) ~40C° (104°F)

## Dimension

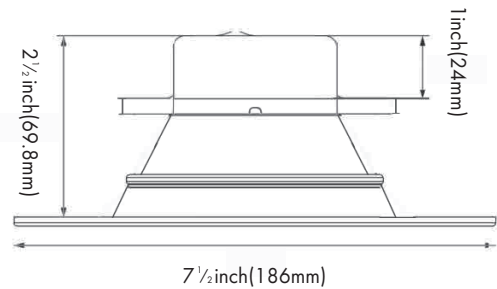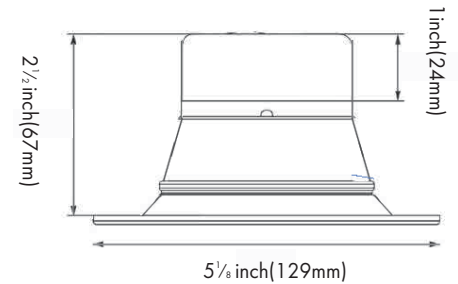

## Ordering Guide Example: LEDRD 15W 6IN 3CT

Fixture Type	Wattage	Color Temp.	Voltage
LEDRD	8W 4IN 15W 6IN	3CCT= CCT adjustable 3000K/4000K/5000K	Blank = 120 V

Fixture Type:
Project Name:
Location:
Date:


## Product Information

3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
8W 4IN	580lm	75lm/W	590lm	75lm/W	600lm	75lm/W
15W 6IN	1115lm	75lm/W	1120lm	75lm/W	1125lm	75lm/W

## Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

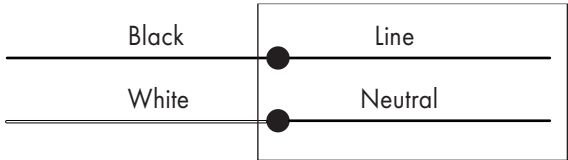

Scan the QR code or visit  
[www.lironlighting.com/product/ledrd](http://www.lironlighting.com/product/ledrd)  
 for the complete luminaire installation guide.

Note:

---

---

---

---

---

---

---

---