

Fixture Type:


Project Name:

Location:

Date:

Features



- 4" / 6" aluminum recessed downlight
- CCT adjustable 3000K/4000K/5000K
- Architectural white finish
- Triac dimming
- E26 adaptor included
- New construction or retrofit application

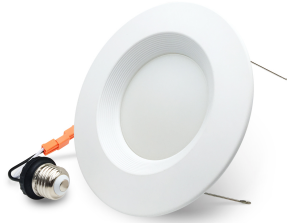

Product Performance Standard

Size	4Inch / 6 Inch	Power Factor	°90%
Weight	2 lb	LED lifespan	50,000 Hrs
Color Temp	3CCT	Dimmable	Triac Dimming
CRI	80	Energy Star	YES
Input Voltage	120V	Warranty	5 Years
Mounting	Recessed	Ambient Operation Temperature	0C° (32°F) ~40C° (104°F)

Dimension

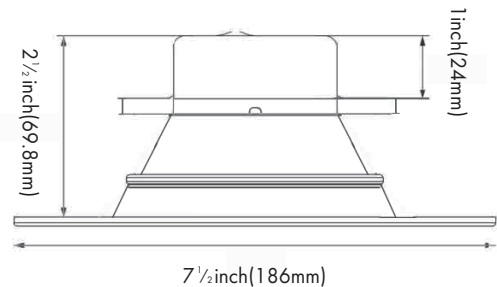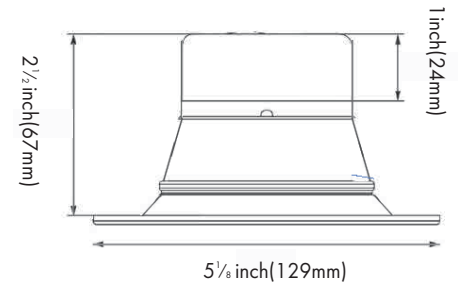

Ordering Guide Example: LEDRD 15W 6IN 3CT

Fixture Type	Wattage	Color Temp.	Voltage
LEDRD	8W 4IN 15W 6IN	3CCT= CCT adjustable 3000K/4000K/5000K	Blank = 120 V


Fixture Type:
Project Name:
Location:
Date:

Product Information

3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
8W 4IN	580lm	75lm/W	590lm	75lm/W	600lm	75lm/W
15W 6IN	1115lm	75lm/W	1120lm	75lm/W	1125lm	75lm/W

Wiring Diagram

CORD/ SUOOLY WIRING LUMINAIRE

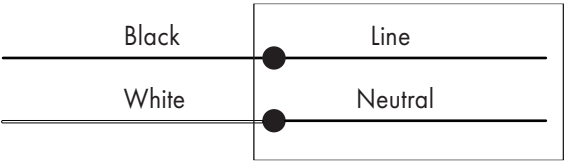

Scan the QR code or visit
www.lironlighting.com/product/ledrd
 for the complete luminaire installation guide.

Note:
