

CRH Series Dusk to Dawn Road Light

Fixture Type:

Project Name:

Location:

Date:

Features



- Heavy-duty cast aluminum housing
- Traditional cobra head appearance
- Removable door 3G vibration rated to ensure strength of construction and longevity in application
- Integral 10kV surge suppression protection standard
- 3 Pin photocell pre-installed
- Available in type II, III distribution



Product Performance Standard

Size	24" L X 10 1/4" W X 4 1/2" H	Power Factor	≥90%
Weight	10 lb	LED Lifespan	50,000 Hrs
IP Rate	IP66	Dimmable	1-10V Dimmable
Color Temp	4000K-5000K	Light Distribution	II/III
CRI	70	Warranty	5 Years
Input Voltage	120-277V / 347-480V	Ambient Operation Temperature	-40C° (-40°F) ~45C° (113°F)

Dimension

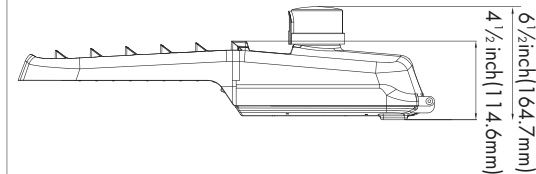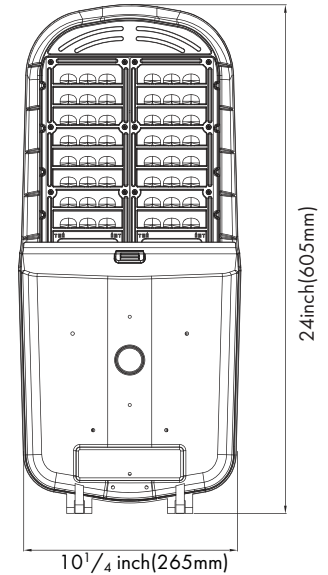

Ordering Guide Example: LEDCRH 45W 50K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Distribution Type
LEDCRH	45W	40K=4000K	Blank = 120-277V	Standard Finish:	3 = Type III
	70W	50K=5000K	HV = 347 -480V	Blank = Silver Grey	
	100W			¹ Premium Finish:	
	150W			DB = Dark Bronze	
				BK = Black	
				WH = White	

Note: 1. Premium finish incur on additional cost, contact factory for MOQ and availability.

Last updated: 6-13-2022

PAGE 1 of 3



Fixture Type:
Project Name:
Location:
Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
45W	6300lm	140lm/W	6350lm	141lm/W
70W	9300lm	133lm/W	9400lm	134lm/W
100W	13600lm	136lm/W	13800lm	138lm/W
150W	19500lm	132lm/W	20000lm	133lm/W

Accessories



Twist lock Photocell Included

- SKU: ALPC
- 3 PIN twist lock photocell included


For the accessories detail, please visit www.lironlighting.com/add-on-accessories

Fixture Type:
Project Name:
Location:
Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

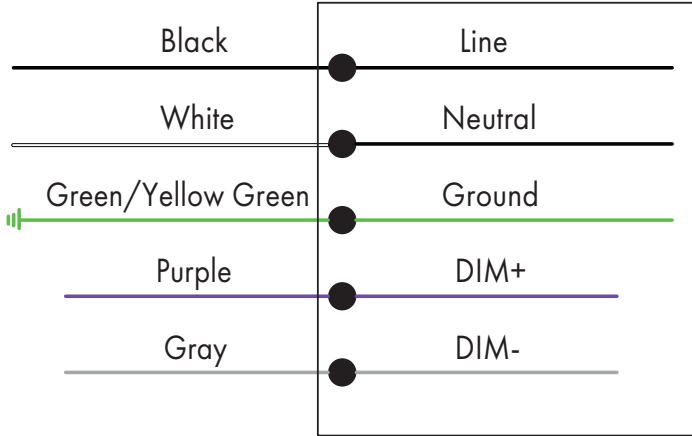

Scan the QR code or visit www.lironlighting.com/products/ledcrh for the complete luminaire installation guide.

Note:
