




## LED Linear Strip Series

2' & 4' linear strip is a versatile linear solution that will fit seamlessly into countless application.

With continuous illumination, wattage and color temperature selectable and surface or suspended mounting. This luminaire is adaptable to your environment.

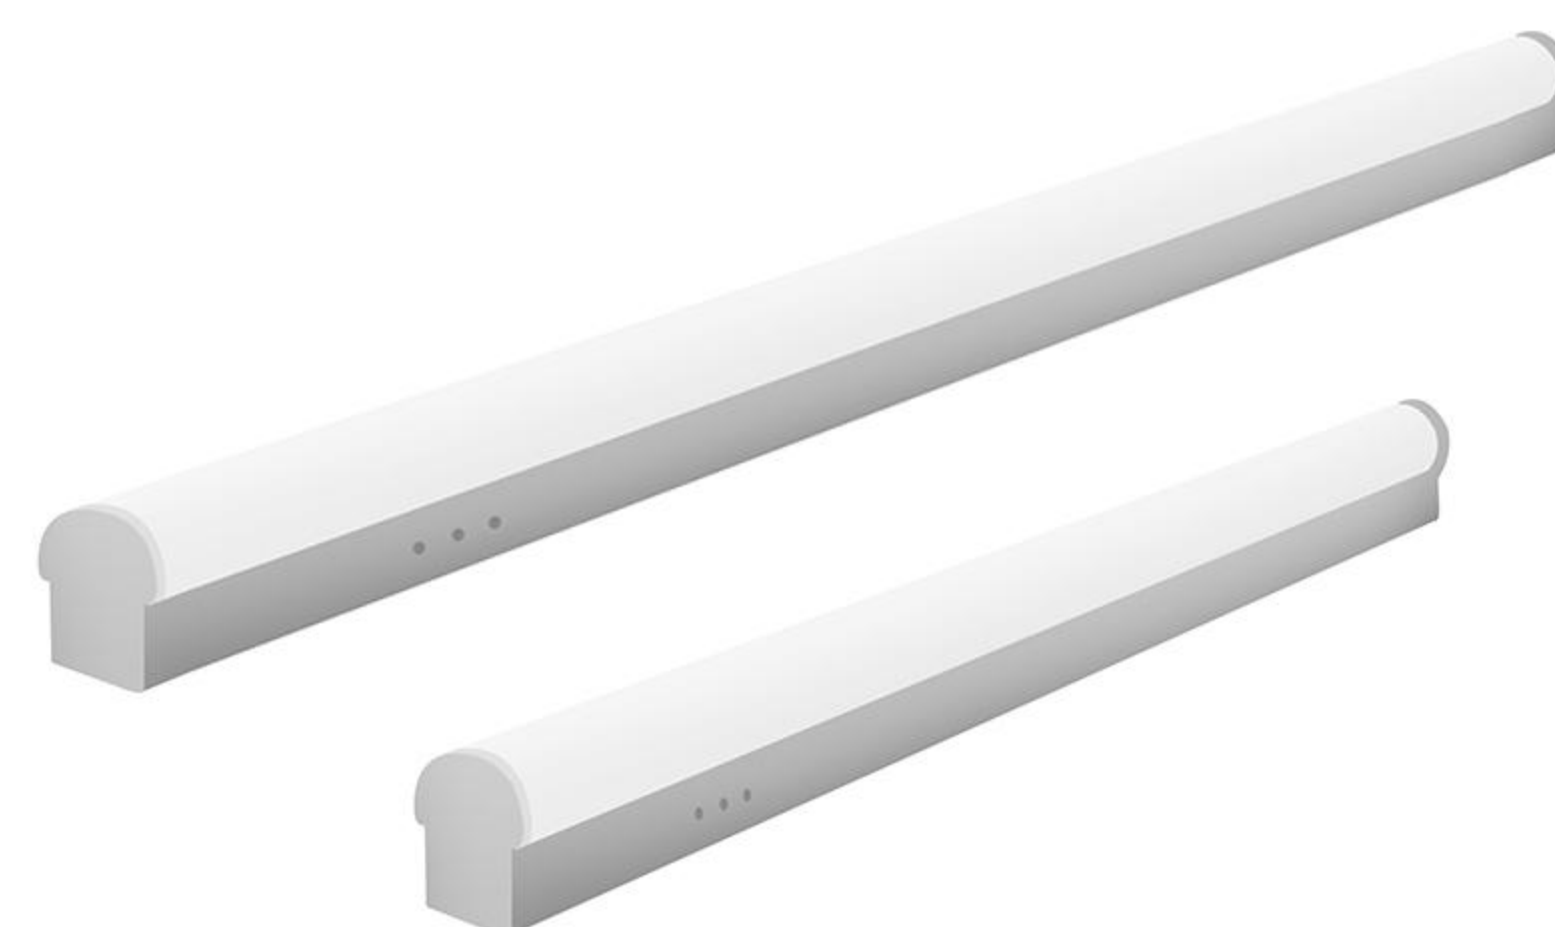

## Quick Fact

- Available in 2' & 4' lengths, also can convert to 8' lengths by used the row connector
- Wattage selectable available in 4' strip (24W/32W/40W)
- Color temperature selectable (3500K/4000K/5000K)
- Standard 0-10V dimming
- Premium die cast aluminum housing with acrylic formed diffuser
- Optional integral emergency battery pack & motion sensor
- DLC Listed



Wattage Selectable  
3CCT Adjustable Technology





# Accessories



### Emergency Battery Backup

Integral battery backup that provide 1000 lm for 90 min of emergency light and automatically recharge When the power is restored



### Motion Sensor

External PIR programmable motion sensor offers Greater control and energy savings including adjustable delay and dimming levels.



### Suspension Mounting Kit

6' lengths Heavy duty hanging chain



### Row Connector

Use for convert the 4 ' strip to 8' strip.

# Performance Data:



Lengths	2 FT		4 FT	
Wattage	25W	24W	32W	45W
Voltage	120-277V	120-277V	120-277V	120-277V
Lumen Output	2600lm	3120lm	4160lm	5200lm
Efficacy	130lm/W	130lm/W	130lm/W	130lm/W
Color Temp	3CCT(3500K/ 4000K/ 5000K)	3CCT(3500K/ 4000K/ 5000K)	3CCT(3500K/ 4000K/ 5000K)	3CCT(3500K/ 4000K/ 5000K)
Dimming	0-10V Dimming	0-10V Dimming	0-10V Dimming	0-10V Dimming
Ambient Operating Temp	-4°F - 104°F	-4°F - 104°F	-4°F - 104°F	-4°F - 104°F
DLC Standard	Yes	Yes	Yes	Yes
Warranty	5 Year	5 Year	5 Year	5 Year
Internal Battery Backup	Yes	Yes	Yes	Yes
PIR Motion Sensor	Yes	Yes	Yes	Yes