





LED UFO High Bay Series

Liron UFO series is an energy-saving high performance LED High Bay Luminaire which utilizes high powered LEDs, precise efficient optical control, and features application versatility through integrated motion sensor and battery backup options. Liron UFO is designed to replace up to 1000W MH and at the same time reduce maintenance by delivery of over 100,000 hours of projected.



Quick Fact

- Compact size measuring only.
- Certified to IP65 for use in wet location.
- One piece die cast aluminum housing provides direct convective heat exchange between LED light engine and cool ambient air.
- 120V through 277V, 50Hz to 60Hz, 347 – 480V option available.
- Hook mount easy installation.
- Electrical components are rated at 100,000 hours at full load and 50°C operating temperature.
- Optional motion sensor, emergency battery for better saving.
- LED drivers are strategically heat sunk to the main housing for maximum reliability and longevity.

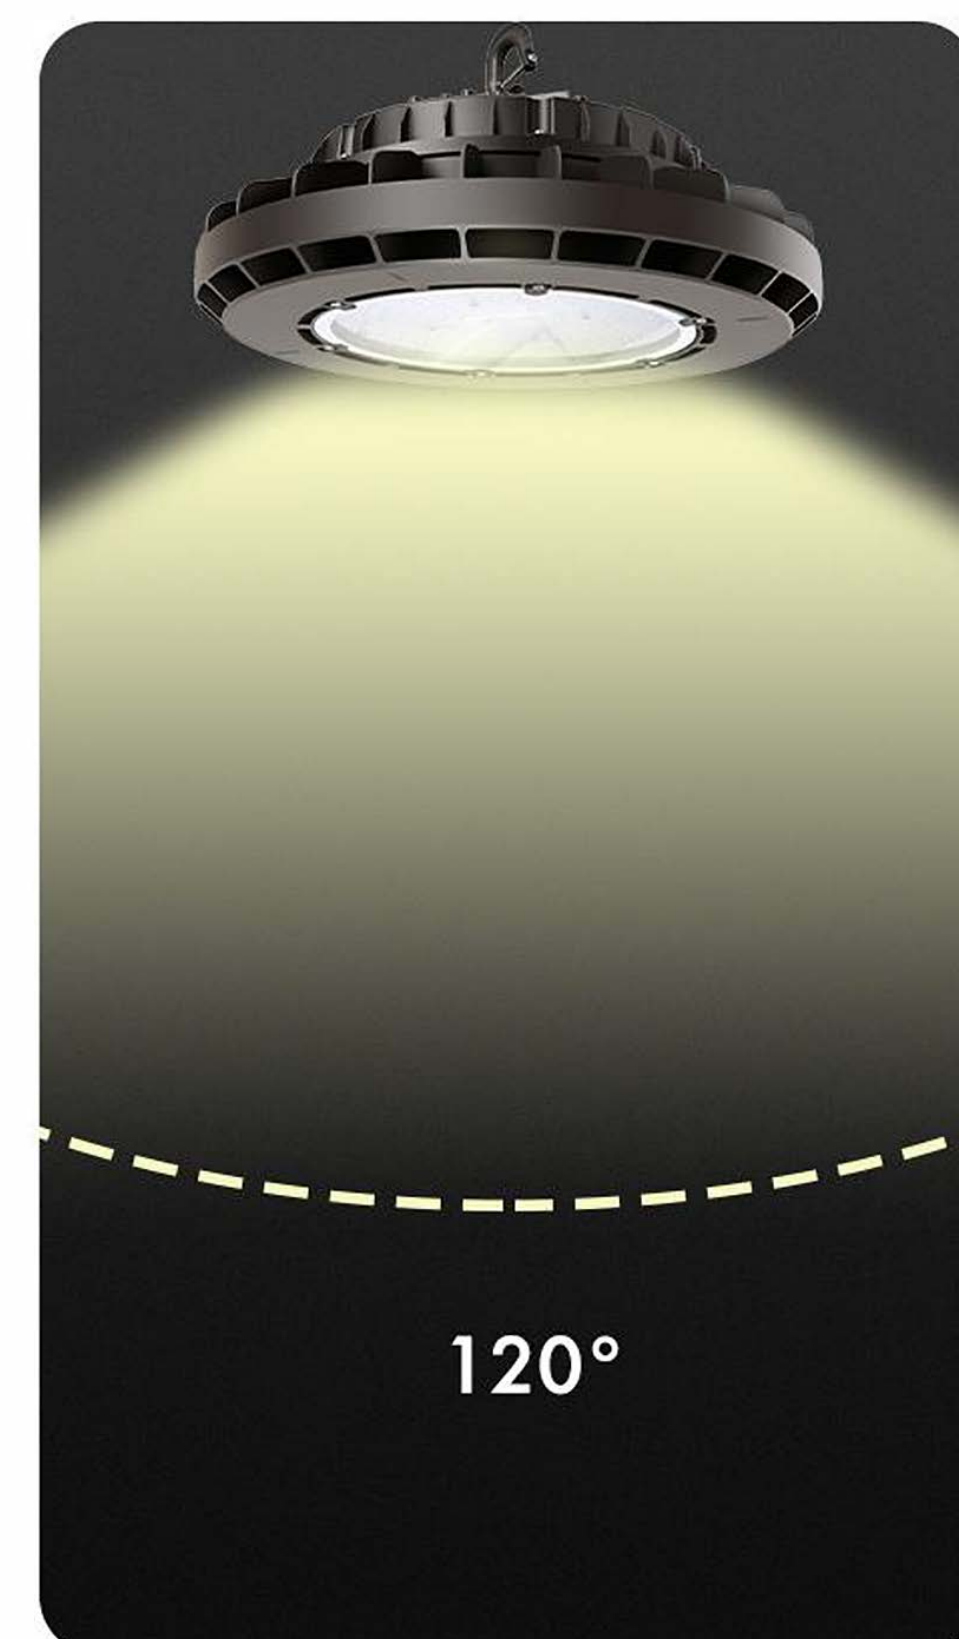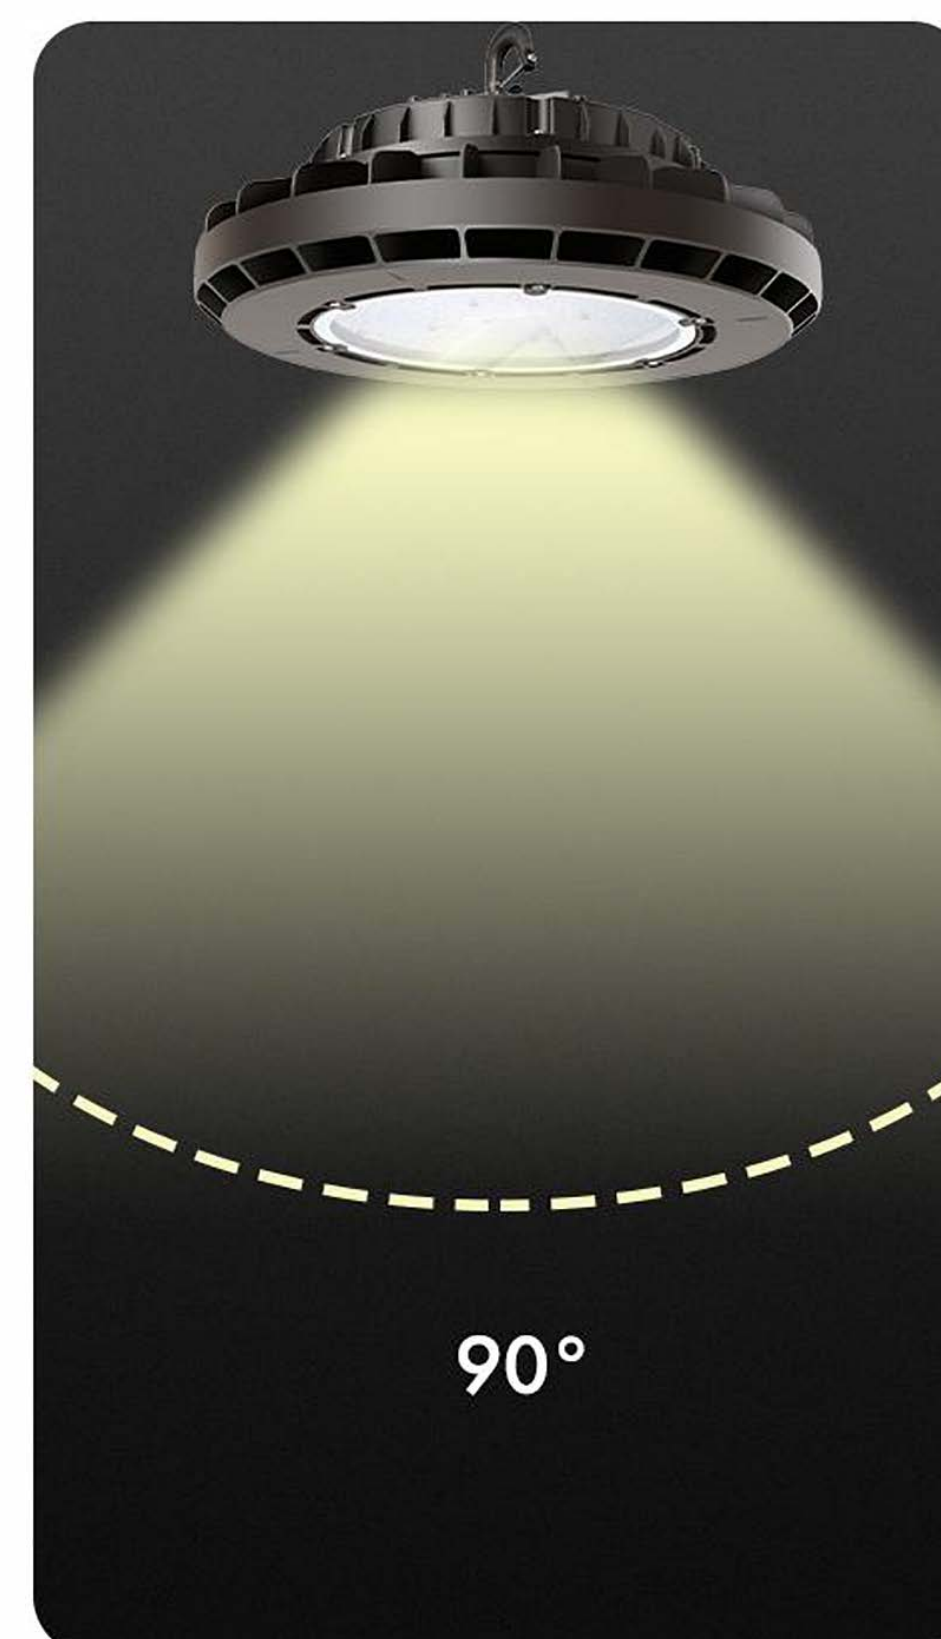



Accessories



Motion Sensor

PIR programmable sensor offers greater control and energy savings including adjustable delay and dimming levels.



Battery Backup

External battery backup that provide 2000lm for 90 min of emergency light and automatically recharge when the power is restored.



Aluminum Reflector

16 Inch aluminum reflector designed to provided 90 degree beam angle and maximized downward efficiency.



Acrylic Reflector

16 Inch Acrylic reflector designed to provided 90 degree beam angle and maximized downward efficiency.



	100W	135W	175W	200W
Wattage	100W	135W	175W	200W
Voltage	120-277V	120-277/347-480V	120-277/347-480V	120-277/347-480V
Lumen output	14000lm	19400lm	25600lm	29800lm
Efficacy	140lm/W	144lm/W	146lm/W	149lm/W
Color Temp.	4000K/5000K	4000K/5000K	4000K/5000K	4000K/5000K
Finish Color	Dark Bronzed	Dark Bronzed	Dark Bronzed	Dark Bronzed
Dimming	1-10V Dimming	1-10V Dimming	1-10V Dimming	1-10V Dimming
THD	≤20	≤20	≤20	≤20
Power Factor	≥90	≥90	≥90	≥90
Ambient Operating Temp	-40°F - 104°F	-40°F - 104°F	-40°F - 104°F	-40°F - 104°F
IP65	YES	YES	YES	YES
DLC	YES	YES	YES	YES
Warranty	5 Year	5 Year	5 Year	5 Year
Battery Backup	YES	YES	YES	YES
PIR Motion Sensor	YES	YES	YES	YES
Aluminum Reflector	YES	YES	YES	YES
Acrylic Reflector	YES	YES	YES	YES