
LED2VT








RISK OF ELECTRIC SHOCK.

Ensure the electricity to the wires you are working on is shut off.


Either remove the fuse or turn off the circuit breaker before removing an existing light fixture or installing the new one.

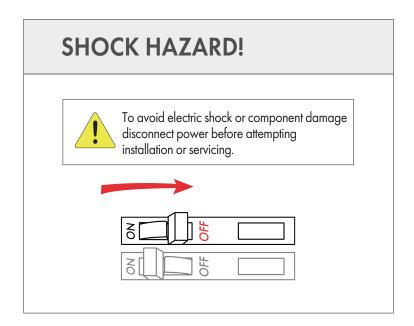

TOOLS REQUIRED

Tools:

- 1. Sharp Side Cutter
- 2. Electric Drill
- 3. Level
- 4. Measuring Tool
- 5. Wire Stripper / Knife
- 6. Philips Screwdrivers
- 7. Wire Cutters

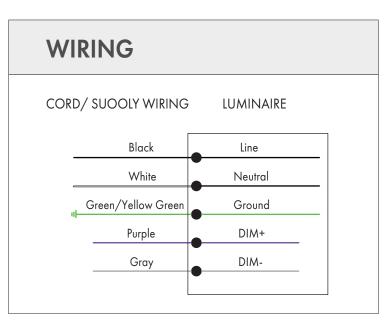










Installation Guide

1. Opening the lens cover by connector of the fixture body.

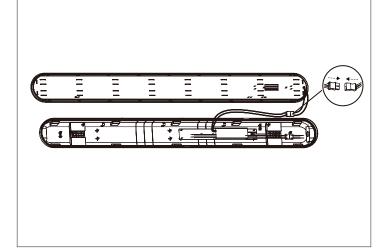

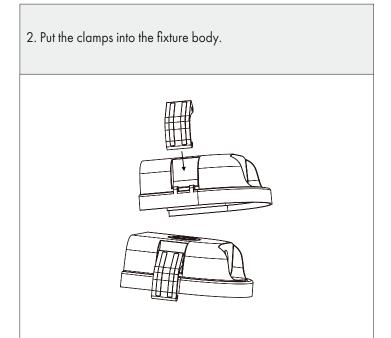

3. Remove the nut from the end of the cord grip and insert the threaded end into the knock out hole on the end of the fixture body.

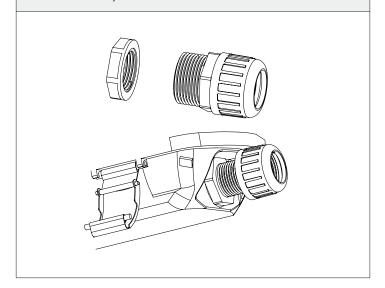

 Feed the wires from the electrical source through the cord grip and into the fixture body.
Tighten the nut onto the cord grip to secure the wires.

