

Fixture Type:

Project Name:

Location:

Date:

Features



- Durable polycarbonate housing
- Polycarbonate latches
- Includes sealed conduit adaptor for 1/2" conduit
- Ribbed frosted polycarbonate lens
- 0-10V dimming driver
- Surface mount
- Compatible with motion sensor and emergency battery



Product Performance Standard

Size	2FT/4FT	Power Factor	≥90%
Weight	6 lb/8 lb	LED lifespan	50,000 Hrs
Color Temp	4000K - 5000K	Dimmable	0-10V Dimming
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~56C° (133°F)

Dimension

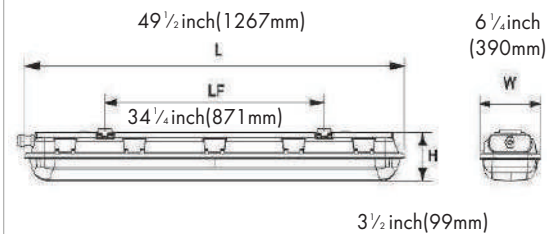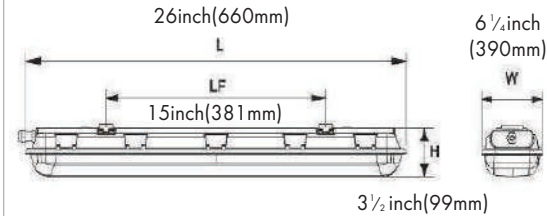

Ordering Guide

Example: LED2VT 4FT 45W 50K

Fixture Type	Size&Wattage	Color Temp.	Voltage	Finish	Optional Accessories
LED2VT	2FT 25 W 4FT 45 W	40K=4000K 50K=5000K	Blank = 120-277V	Blank =White	Blank = No Accessories MS = Motion Sensor (BL-PIR-/DIP-W-EXT) EM = Emergency Battery Backup (S-EMBK8WLW-INT)

Fixture Type:

Project Name:

Location:

Date:

Product Information

LENGTH	WATTAGE	4000K		5000K	
		LUMEN	EFFICACY	LUMEN	EFFICACY
2'	25W	2928lm	123lm/W	3000lm	125lm/W
4'	45W	4428lm	123lm/W	4500lm	125lm/W

Optional Accessories



PIR - Motion Sensor

- SKU: BL-PIR/DIP-W-EXT
- Suitable for wet location
- External PIR Motion Sensor is field installed or pre-installed by request.




Emergency Battery Backup

- SKU: S-EMBK8WLV-INT
- Internal battery backup is field installed or pre-installed by request.
- Delivery 1000 lumen for 90min emergency use.

For the accessories detail, please visit www.lironlighting.com/add-on-accessories

Fixture Type:
Project Name:
Location:
Date:

Wiring Diagram

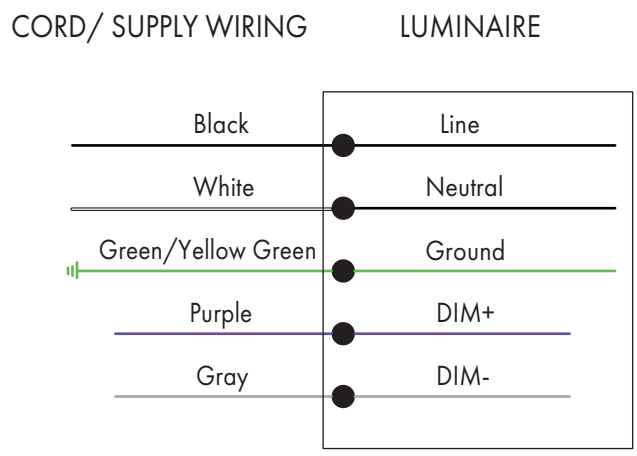

Scan the QR code or visit www.lironlighting.com/product/led2vt for the complete luminaire installation guide.

Note:
