LIRON LIGHTING

WP Series Standard Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Features

- Rugged die cast aluminum housing and seals to housing gasket with stainless steel screws
- Dark bronze powder coat finish
- Polycarbonate optical lens with UV stabilizer
- 1/2 inch threaded hole for easier wire connections
- J box or surface mounting
- Compatible with internal photocell and emergency battery

5 YEAR WARRANTY · IP65 WATER RESISTANT · FC CE · DLC DLC OPL LISTED · UL CERTIFIED SAFETY US E489430

Dimension

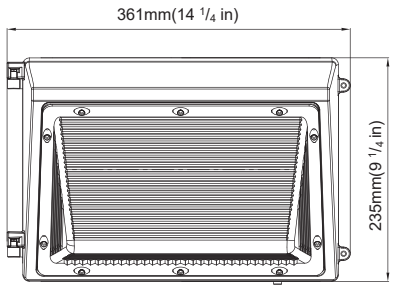

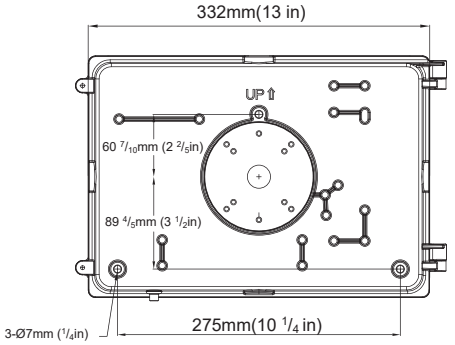



Product Performance Standard

Size	14 1/4″Lx7 1/4″Wx9 1/4″H	**Power Factor**	90%
Weight	6 lb	**LED Lifespan**	50,000 Hrs
IP Rate	IP65	**Dimmable**	Non Dimmable
Color Temp	4000K-5000K	**Photocell**	YES
CRI	70	**Warranty**	5 Years
Input Voltage	120-277V /347-480V	**Ambient Operation Temperature**	-40C° (-40°F) ~ 40C °(104°F)

Ordering Guide

Example: LEDWP 42W 50K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Optional Accessories
LEDWP	30 W 42 W 65 W 90 W 125W	40K=4000K 50K=5000K	Blank = 120-277V HV = 347 -480V	Blank = Dark Bronzed BK = Black WH = White	Blank = No Accessories PC = Photocell (-WPPC) EM = Emergency Battery Backup (-A-EMBK8WLV-INT)

Note: The 30W is only compatible with 120-277V
The emergency battery backup only compatible with 30W/42W/65W

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LIRON LIGHTING

LEDWP Series Standard Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Product Information

	4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
30W	3550lm	118lm/W	3600lm	120lm/W
42W	5000lm	119lm/W	5100lm	121lm/W
65W	7800lm	120lm/W	7900lm	122lm/W
90W	10000lm	111lm/W	10500lm	117lm/W
125W	14500lm	116lm/W	15000lm	120lm/W

Optional Accessories

Internal Button Photocell

-SKU: WPPC
-Internal photocell is field installed or pre-installed by request

Internal Emergency Battery Backup

-SKU: A-EMBK8WLV-INT
-Internal battery backup is field installed or pre-installed by request
-Delivery 900 lumen for 90 minutes emergency operation
Only compatible for 30W/42W/65W

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LiRON LiGHTING

WP Series Standard Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Wiring Diagram

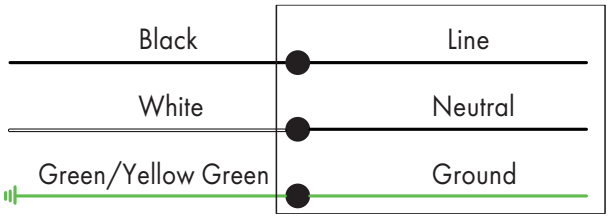

Scan the QR code or visit
www.lironlighting.com/product/ledwp
for the complete luminaire installation guide.

Note:

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.