

# LEDLSPL Series

LED Sport Light

Fixture Type:

Project Name

Location:



Date:

## Features

- Heavy duty die-cast aluminum housing with UV stabilized polyester powder paint finish
- Dynamic thermal management design that maximizes heat dissipation
- Built in surge suppression with Max. 20KV
- NEMA 4HX4V standard distribution equivalent to 60 degree beam angle, optional 3H x 3V equivalent to 40 degree beam angle.
- 0-10V dimming driver
- Low glare shields and laser aiming included
- Adjustable trunnion mount, optional 2 3/8" Yoke mount adaptor



## Dimensions

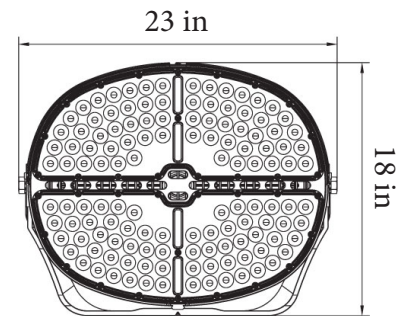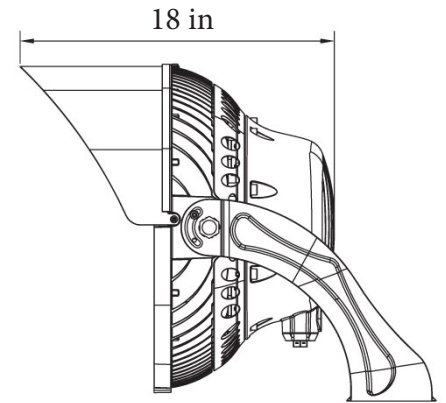

## Product Performance Standard

Size	15 x 20 x 16 inch	Power Factor	90%
Weight	45 lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	0-10V Dimmable
Color Temp	4000K/5000K/5700K	Efficacy	Up to 142 lm/W
CRI	70	Warranty	10 Years
Input Voltage	200-480V	Ambient Operation Temperature	-40C° (-40°F) ~ 55C° (131°F)

## Ordering Guide

Example: LEDLSPL 850W 50K

Fixture Type	Wattage	<sup>2</sup> Color Temp.	Voltage	<sup>1</sup> Distribution	Optional Accessories
LEDLSPL	1850 W	40K = 4000K 50K = 5000K 57K = 5700K	UHV =200-480V	Blank = 4H X 4V 3H3V = 3H X 3V	Blank = No accessories SPL-TRSPA = Yoke Mount Adaptor

- Notes: 1. 4H X 4V is standard distribution lens(60 degree beam angle), optional 3H X 3V distribution lens(40 degree beam angle), consult factory for availability.
2. Standard CCT is 5700K, optional 4000K and 5000K is special order, consult factory for availability.

# LEDLSPL Series

LED Sport Light

**Fixture Type:**

**Project Name**

**Location:**


**Date:**

## Product Information

**5700K**

WATTAGE	EPA	LUMEN	EFFICACY
850W	2.5471	118,000 lm	139 lm/W

## Optional Accessories



### Yoke Adaptor

- SKU: SPL-TRSPA
- Provided to apply the fixture on a 2 3/8" tenon for easy installation.

For the accessories detail, please visit [www.lironlighting.com/product\\_categories/add-on-accessories](http://www.lironlighting.com/product_categories/add-on-accessories)