

LEDLSPL Series

LED Sport Light

Fixture Type:

Project Name

Location:



Date:

Features

- Heavy duty die-cast aluminum housing with UV stabilized polyester powder paint finish
- Dynamic thermal management design that maximizes heat dissipation
- Built in surge suppression
- NEMA 4HX4V standard distribution, optional 3H X 3V distribution available
- 0-10V dimming driver
- Low glare shields provided
- Adjustable trunnion mount, optional 2 3/8" Yoke mount adaptor



Dimensions

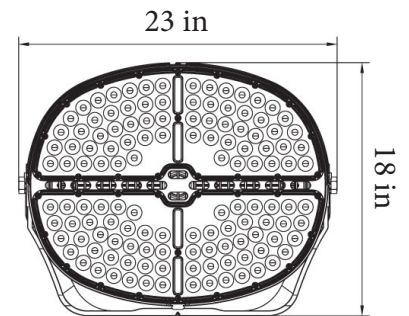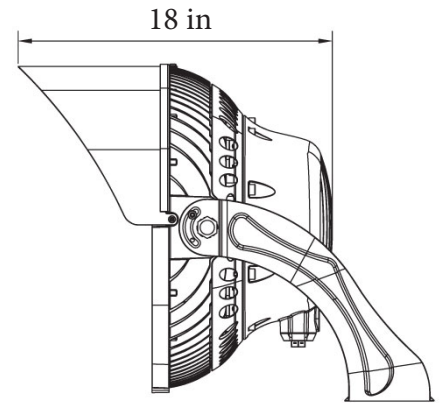

Product Performance Standard

Size	15 x 20 x 16 inch	Power Factor	90%
Weight	45 lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	4000K/5000K	Efficacy	Up to 142 lm/W
CRI	70	Warranty	10 Years
Input Voltage	120-277V or 277-480V	Ambient Operation Temperature	-40C° (-40°F) ~ 55C° (131°F)

Ordering Guide

Example: LEDLSPL 850W 50K

Fixture Type	Wattage	Color Temp.	Voltage	Distribution	Optional Accessories
LEDLSPL	1850 W	40K = 4000K 50K = 5000K 57K = 5700K	Blank= 120-277V HV =277-480V	Blank = 4H X 4V 3H3V = 3H X 3V	Blank = No accessories SPL-TRSPA = Yoke Mount Adaptor

Notes: 1. 4H X 4V is standard distribution lens, optional 3H X 3V distribution lens, consult factory for availability.



LEDLSPL Series

LED Sport Light

Fixture Type:

Project Name


Location:

Date:

Product Information

		4000K		5000K	
WATTAGE	EPA	LUMEN	EFFICACY	LUMEN	EFFICACY
850W	2.5471	117,300 lm	138 lm/W	118,000 lm	139 lm/W

Optional Accessories




Yoke Adaptor

- SKU: SPL-TRSPA
- Provided to apply the fixture on a 2 3/8" tenon for easy installation.

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories



Wiring Diagram

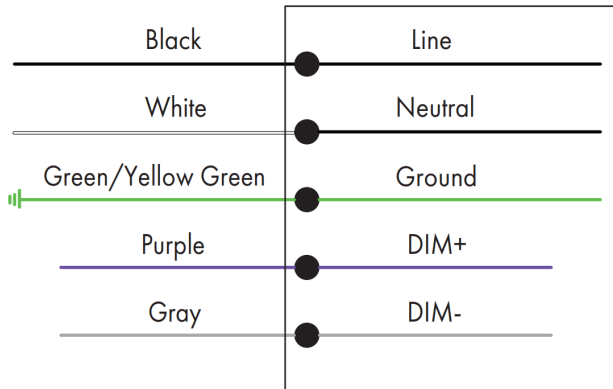

Scan the QR code or visit
www.lironlighting.com/product/ledspl for
the complete luminaire installation guide.

NOTE: