

LEDL SPL Series

LED Sport Light

Fixture Type:

Project Name

Location:

Date:

Features



- Heavy duty die-cast aluminum housing with UV stabilized polyester powder paint finish
- Dynamic thermal management design that maximizes heat dissipation
- Built in surge suppression with Max. 20KV
- NEMA 4HX4V standard distribution, optional 3H X 3V distribution available
- 0-10V dimming driver
- Low glare shields and laser aiming included
- Adjustable trunnion mount, optional 2 3/8" Yoke mount adaptor



Product Performance Standard

Size	15 x 20 x 16 inch	Power Factor	90%
Weight	45 lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	4000K/5000K/5700K	Efficacy	Up to 142 lm/W
CRI	70	Warranty	10 Years
Input Voltage	200-480V	Ambient Operation Temperature	-40C° (-40°F) ~ 55C° (131°F)

Dimensions

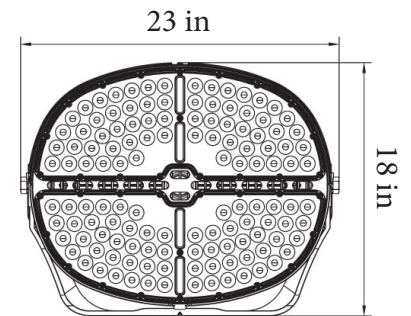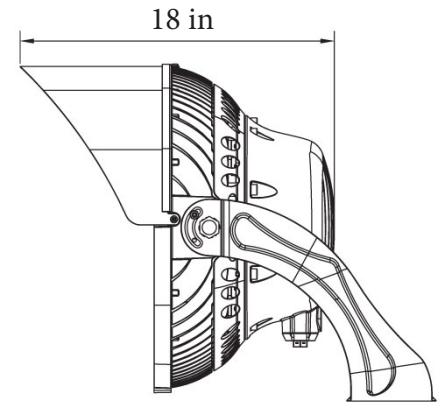

Ordering Guide

Example: LEDL SPL 850W 50K

Fixture Type	Wattage	² Color Temp.	Voltage	¹ Distribution	Optional Accessories
LEDL SPL	1850 W	40K = 4000K 50K = 5000K 57K = 5700K	UHV =200-480V	Blank = 4H X 4V 3H3V = 3H X 3V	Blank = No accessories SPL-TRSPA = Yoke Mount Adaptor

- Notes:** 1. 4H X 4V is standard distribution lens, optional 3H X 3V distribution lens, consult factory for availability.
2. Standard CCT is 5700K, optional 4000K and 5000K is special order, consult factory for availability.

LEDLSPL Series

LED Sport Light

Fixture Type:

Project Name

Location:


Date:

Product Information

5700K

WATTAGE	EPA	LUMEN	EFFICACY
850W	2.5471	118,000 lm	139 lm/W

Optional Accessories



Yoke Adaptor

- SKU: SPL-TRSPA
- Provided to apply the fixture on a 2 3/8" tenon for easy installation.

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories