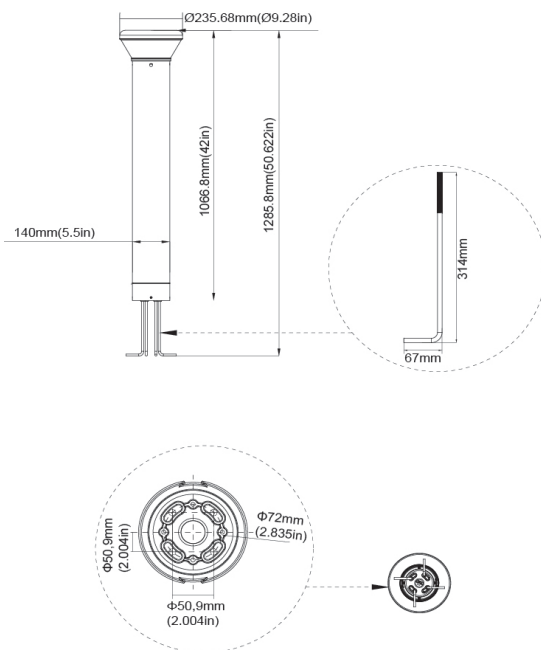# BLR2 Series
Wattage & 3CCT Selectable Bollard

Features

- Durable die cast aluminum housing
- Dark bronze polyester powder coat finish
- Annular diffuser provide glow soft light around
- Wattage selectable from 10W to 26W with efficacy of up to 119 lm/W
- 3CCT adjustable 3000K/4000K/5000K
- 360 degrees surround illumination with 80 CRI
- Optional emergency battery available

Switch for wattage & 3CCT selectable

Dimensions

Ø235.68mm(Ø9.28in)

1066.8mm(42in)
1285.8mm(50.622in)

140mm(5.5in)

314mm

67mm

Φ72mm (2.835in)

Φ50,9mm (2.004in)

Φ50,9mm (2.004in)

5 YEAR WARRANTY · IP65 · FC · CE · UL LISTED

Product Performance Standard

Size	42in x 5.5in	Power Factor	90%
Weight	12lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 122 lm/W
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (113°F)

Ordering Guide   Example: BLR2-UW3CCT

Fixture Type	Wattage	Color Temp.	Voltage	¹Finish	Optional Accessories
BLR2	UW (Wattage Switchable 10W/15W/20W/26W)	3CCT = Color Temp. Adjustable (30K/40K/50K)	Blank = 120-277V	Standard Finish Blank = Dark Bronze ¹Premium Finish BK = Black WH = White	Blank = No accessories EM = Emergency battery backup (-S-EMBK8WLV-INT)

Note: 1.Premium finish incur an additional cost. Contact factory for MOQ and availability.

Updated: 10-12-2022

10835 S Wilcrest Dr, Ste C Houston TX 77099 │ **Customer Service : 833-875-4766** │ **Email : Sales@lironlighting.com**

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

BLR2 Series
Wattage & 3CCT Selectable Bollard

Product Information

	3000K		4000K		5000K	
WATTAGE	**LUMEN**	**EFFICACY**	**LUMEN**	**EFFICACY**	**LUMEN**	**EFFICACY**
26W	2800lm	110lm/W	3000lm	115lm/W	3100lm	119lm/W
20W	2200lm	110lm/W	2300lm	115lm/W	2380lm	119lm/W
15W	1650lm	110lm/W	1725lm	115lm/W	1785lm	119lm/W
10W	1100lm	110lm/W	1150lm	115lm/W	1190lm	119lm/W

Optional Accessories

Internal Emergency battery backup
- SKU: S-EMBK8WLV-INT
- Internal emergency battery backup is pre-installed by request
- Provide up to 1000 lumen in emergency situations

For the accessories detail, please visit www. lironlighting.com/product_categories/add-on-accessories

BLR2 Series
Wattage & 3CCT Selectable Bollard

Wiring Diagram

Black	Line
White	Neutral
Green/Yellow Green	Ground
Purple	DIM+
Gray	DIM-

Scan the QR code or visit
www.lironlighting.com/product/BLR2 for the
complete luminare installation guide.

NOTE:

10835 S Wilcrest Dr, Ste C Houston TX 77099 │ **Customer Service : 833-875-4766** │ **Email : Sales@lironlighting.com**

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.