LiRON LiGHTING

PST2 Series

Architectural Post Top Light

Fixture Type:

Project Name:

Location:

Date:

Features

- Architectural double arm post top
- Rugged die-cast aluminum housing
- Dark bronze powder coat finish with polycarbonate lens
- Wattage selectable from 45W to 130W with efficacy of up to 122 lm/W
- CCT adjustable 3000K/4000K/5000K
- Zero up light and low glare at angles
- Easy installation on 2-3/8" or 3" diameter round pole
- Universal input voltage 120-277V

Switch for wattage & 3CCT selectable

Dimensions



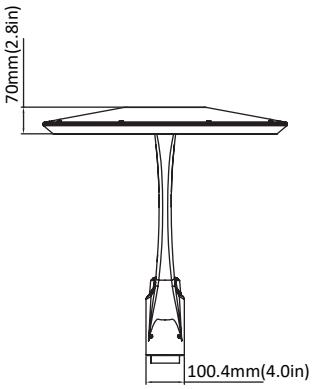

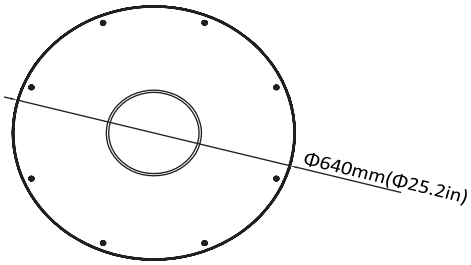

Product Performance Standard

Size	25"x24"x2.8"	**Power Factor**	90%
Weight	5lb	**Life Span**	50,000 Hrs
IP Rate	IP65	**Dimmable**	1-10V Dimmable
Color Temp	3CCT 30/40/50K	**Efficacy**	Up to 122 lm/W
CRI	80	**Warranty**	5 Years
Input Voltage	120-277V	**Ambient Operation Temperature**	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide

Example: PST2-UW3CCT-130W

Fixture Type	Wattage	Color Temp.	Wattage Options	[1]Finish	Optional Accessories
PST2	UW (Wattage Selectable 130W/87W/70W/45W)	3CCT = Color Temp. Adjustable (30K/40K/50K)	130W = Maximum Wattage 130W	Standard Finish Blank = Dark Bronze [1]Premium Finish BK = Black WH = White	Blank = No accessories MS = Motion Sensor (BL-PIR823-IN) [2]PC = Photocell (-ALPC)

Note: 1.Premium finish incur an additional cost. Contact factory for MOQ and availability.
2. Photocell is require factory special installation, please contact us for more information.

Updated: 1-9-2022

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LIRON LIGHTING

PST2 Series

Architectural Post Top Light

Fixture Type:

Project Name:

Location:

Date:

Product Information

	4000K		5000K	
WATTAGE	**LUMEN**	**EFFICACY**	**LUMEN**	**EFFICACY**
45W	5400lm	120lm/W	5500lm	130lm/W
70W	8400lm	120lm/W	8500lm	130lm/W
87W	10500lm	121lm/W	10600lm	122lm/W
130W	15600lm	120lm/W	15800lm	122lm/W

Optional Accessories

Twist Lock Photocell

- SKU: ALPC
- Photocell is factory install only, please contact us for more information.

PIR Motion Sensor

- SKU: BL-PIR823-IN
- Internal motion sensor is pre-installed by request

For the accessories detail, please visit www. lironlighting.com/product_categories/add-on-accessories

EPA OF POST TOP

Item	
EPA	0.9696

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LIRON LIGHTING

PST2 Series

Architectural Post Top Light

Fixture Type:

Project Name:

Location:

Date:

Wiring Diagram

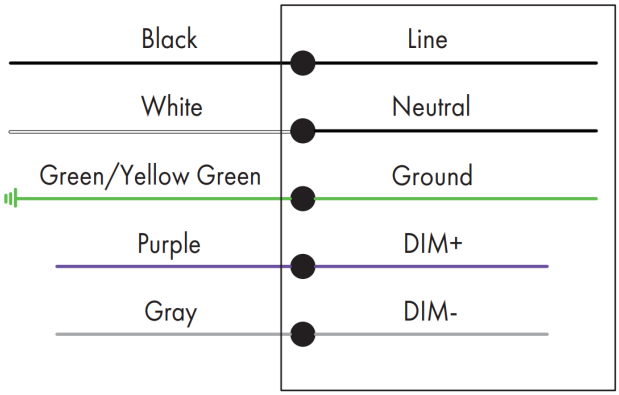

Scan the QR code or visit www.lironlighting.com/product/PST2 for the complete luminare installation guide.

NOTE:

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.