

DTD Series Dusk to Dawn

Features


- Durable die cast aluminum housing with Silver gray polyester powder coast finish
- Zero uplight design for environmentally friendly installation
- Versatile mounting options: bracket that adjusts to fit both arm mount or direct wall mounting
- 3 Pin twist lock photocell included



Product Performance Standard

Size	14 1/4″LX 7 1/4″W	Power Factor	90%
Weight	5 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable 1-10V Dimmable	
Color Temp	4000K-5000K	Photocell Included	
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~40C °(104°F)

Ordering Guide Example: LEDDTD 45W50K

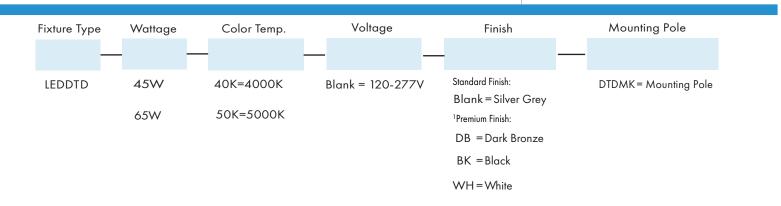

Note: 1. Premium finish incur on additional cost, contact factory for MOQ and availability.


Fixture Type:


Project Name:

Location:

Date:

Dimension







Product Information

	4000K		5000K		
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	
45W	6150lm	137lm/W	6200lm	138lm/W	
65W	8650lm	133lm/W	8800lm	135lm/W	

Optional Accessories

Internal Photocell Included			
-SKU: ALPC -3 PIN twist lock photocell is field installed or pre-installed by request.			
Arm Mount Kit			
-SKU: DTD-MK -For the pole mount option			

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories/



Wiring Diagram

CORD/ SUPPLY WIRING LUMINAIRE

Black
Line

White
Neutral

Green/Yellow Green
Ground

Purple
DIM+

Gray
DIM



Project Name:

Location:

Date:



Scan the QR code or visit www.lironlighting.com/products/leddtd for the complete luminaire installation guide.

Note: