

Features




- Low profile, rugged die-cast aluminum housing
- Dark bronze powder coat finish
- UV stabilized polycarbonate optical lens
- 1-10V dimming driver
- Standard surface mount or J box mount
- 3/4" pendant mount available as an option
- Suitable for motion sensor



Product Performance Standard

Size	9" X 9" X 3 1/4"	Power Factor	≥90%
Weight	4 lb	LED Lifespan	100,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimming
Color Temp	4000K-5000K	Photometry	Parking Garage
CRI	70	Warranty	10 Years
Input Voltage	120-277V/347-480V	Ambient Operation Temperature	-40C° (-40°F) ~45C° (113°F)

Dimension

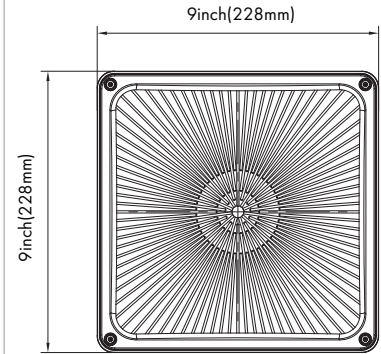

Ordering Guide

Example: LEDCNP 27W 40K

Fixture Type	Wattage	Color Temp.	¹ Voltage	Finish	Optional Accessories
LEDCNP-D	27W	40K=4000K	Blank = 120-277V	Standard finish:	Blank = No Accssories
	40W	50K=5000K	HV = 347-480V	Blank = Dark Bronze	MS = External Motion Sensor (BL-PIR-EXT)
	60W			¹ Premium finish:	MMS = Internal Microwave Motion Sensor (BL-810MW-IN)
				BK = Black	
				WH = White	

Note: 1. Premium finish incur on additional cost, contact factory for MOQ and availability.

LEDCNP-D Rev 1-13-23 PAGE 1 of 3



Fixture Type:

Project Name:

Location:

Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
27W	3750lm	130lm/W	3800lm	130lm/W
40W	5350lm	139lm/W	5450lm	141lm/W
60W	7800lm	134lm/W	8000lm	136lm/W

Optional Accessories

External PIR Motion Sensor



- SKU:BL- PIR819-EX
- External motion sensor is field installed or pre-installed by request.
- Provides multi-level control based on motion and daylight contribution

Internal Microwave Motion Sensor




- SKU: BL-810MW-IN
- Internal photocell is field installed or pre-installed by request
- Provides multi-level control based on motion and daylight contribution

Fixture Type:
Project Name:
Location:
Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

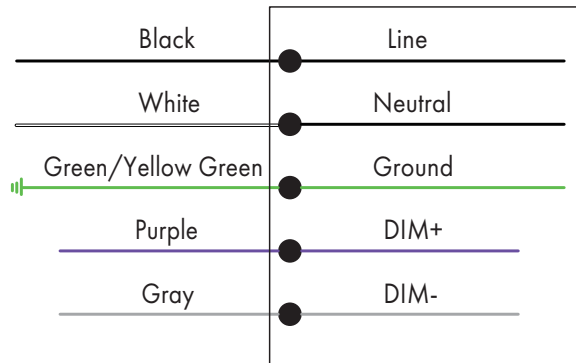

Scan the QR code or visit
www.lironlighting.com/products/ledcnp-d
 for the complete luminaire installation guide.

Note:
