

Features




- Low profile, rugged die-cast aluminum housing
- Dark bronze powder coat finish
- UV stabilized polycarbonate optical lens
- Standard surface mount or J box mount
- 3/4" pendant mount available as an option



Product Performance Standard

| | | | |
|----------------------|--------------------------|--------------------------------------|--------------------------------|
| Size | 9 1/2" X 9 1/2" X 3 1/4" | Power Factor | ≥90% |
| Weight | 4 lb | LED Lifespan | 50,000 Hrs |
| IP Rate | IP65 | Dimmable | Non Dimmable |
| Color Temp | 4000K-5000K | Photometry | Parking Garage |
| CRI | 70 | Warranty | 5 Years |
| Input Voltage | 120-277V | Ambient Operation Temperature | -40C° (-40°F) ~45C° (113°F) |

Dimension

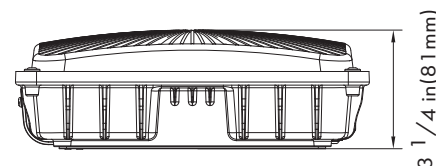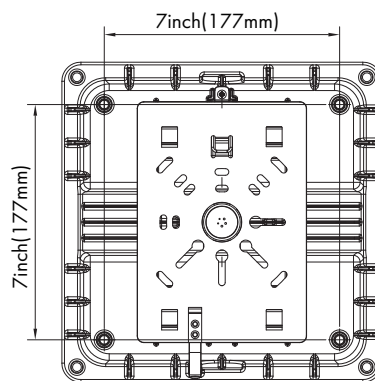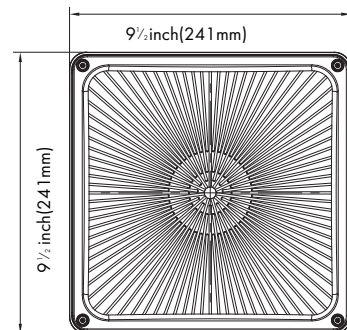

Ordering Guide

Example: LEDCNP 27W 40K

| Fixture Type | Wattage | Color Temp. | Voltage | Finish |
|--------------|-------------------|------------------------|------------------|---|
| LEDCNP | 27W 40W 60W | 40K=4000K 50K=5000K | Blank = 120-277V | Standard finish: Blank = Dark Bronze 1Premium finish: BK = Black WH = White |

Note: 1. Premium finish incur on additional cost, contact factory for MOQ and availability.

LEDCNP Rev 12-5-2022 PAGE 1 of 3





CNP Series Square Canopy

Fixture Type:

Project Name:

Location:

Date:

Product Information

| 4000K | | | 5000K | |
|---------|--------|----------|--------|----------|
| WATTAGE | LUMEN | EFFICACY | LUMEN | EFFICACY |
| 27W | 3750lm | 130lm/W | 3800lm | 130lm/W |
| 40W | 5350lm | 139lm/W | 5450lm | 141lm/W |
| 60W | 7800lm | 134lm/W | 8000lm | 136lm/W |





CNP Series Square Canopy

Fixture Type:

Project Name:


Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

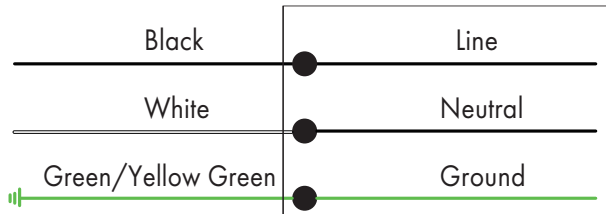

Scan the QR code or visit
www.lironlighting.com/product/ledcnp
for the complete luminaire installation guide.

Note:

