

Features




- Low profile, rugged die-cast aluminum housing
- Dark bronze powder coat finish
- UV stabilized polycarbonate optical lens
- Standard surface mount or J box mount
- 3/4" pendant mount available as an option



Product Performance Standard

Size	9 1/2" X 9 1/2" X 3 1/4"	Power Factor	≥90%
Weight	4 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	Non Dimmable
Color Temp	4000K-5000K	Photometry	Parking Garage
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~45C° (113°F)

Dimension

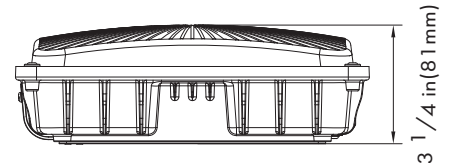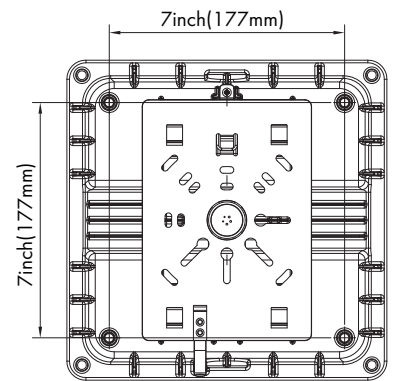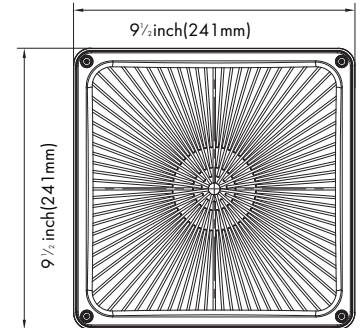

Ordering Guide

Example: LEDCNP 27W 40K

Fixture Type	Wattage	Color Temp.	Voltage	Finish
LEDCNP	27W 40W	40K=4000K 50K=5000K	Blank = 120-277V	Standard finish: Blank = Dark Bronze 1Premium finish: BK = Black WH = White

Note: 1. Premium finish incur on additional cost, contact factory for MOQ and availability.

LEDCNP Rev 12-5-2022 PAGE 1 of 3





CNP Series Square Canopy

Fixture Type:

Project Name:

Location:

Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
27W	3750lm	130lm/W	3800lm	130lm/W
40W	5350lm	139lm/W	5450lm	141lm/W





CNP Series Square Canopy

Fixture Type:

Project Name:


Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

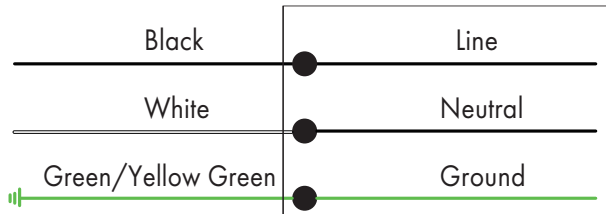

Scan the QR code or visit
www.lironlighting.com/product/ledcnp
for the complete luminaire installation guide.

Note:

