

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Features



- Large LED flood light with 7Hx6V NEMA distributions
- 1-10V dimming driver
- Rugged die-cast aluminum housing
- Vented housing separated LEDs module from driver, maximizing fixture lifespan and performance
- Door frame seals to housing with a continuous extruded silicone gasket
- Slipfitter or trunnion mount
- Compatible with photocell



## Product Performance Standard

<b>Size</b>	6 1/8" L X 11" W X 5" H	<b>Power Factor</b>	≥90%
<b>Weight</b>	7 lb	<b>LED Lifespan</b>	50,000 Hrs
<b>IP Rate</b>	IP65	<b>Dimmable</b>	1-10V Dimmable
<b>Color Temp</b>	4000K-5000K	<b>Photometry</b>	7Hx6V
<b>CRI</b>	70	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V/347-480V	<b>Ambient Operation Temperature</b>	-40C° (-40°F) ~40C° (104°F)

## Dimension

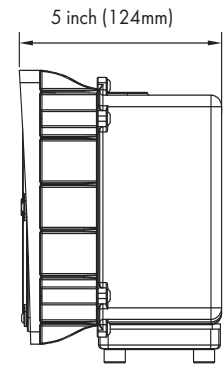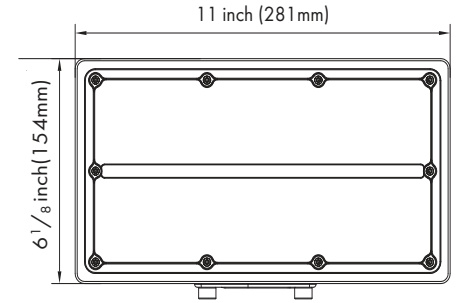

## Ordering Guide

Example: LEDLFL 70W 40K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Mounting	Optional Accessories
LEDLFL	70W 100W	40K=4000K 50K=5000K	Blank = 120-277V HV = 347-480V	Standard finish: Blank = Dark Bronze 1 Premium finish: BK = Black WH = White	TM = Trunnion SP = Slipfitter	Blank = No Accessories 2PC = Photocell (-WPPC)

Note: 1. Premium finish incur on additional cost, contact factory for MOQ and availability.  
2. Photocell only suitable for standard voltage 120-277V.

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
70W	8900lm	127lm/W	9000lm	127lm/W
100W	13300lm	133lm/W	13400lm	133lm/W

## Optional Accessories



### Internal Photocell

-SKU: WPPC

-Internal photocell is field installed or pre-installed by request.

For the accessories detail, please visit [www.lironlighting.com/add-on-accessories](http://www.lironlighting.com/add-on-accessories)


## Mounting Options



### Slipfiter Mount -

SKU: SP

- Fit 2-3/8" horizontal tenon arm

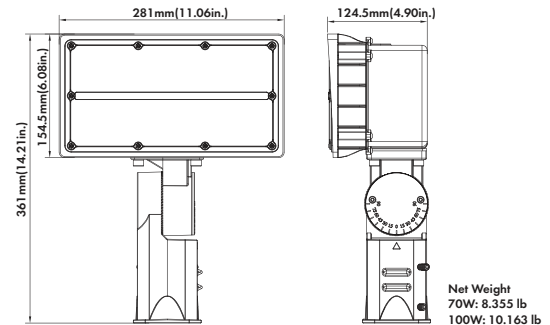

### Trunion Mount

-SKU: TM

