

Fixture Type:

Project Name:

Location:



Date:

Features

- Traditional style LED Post Top
- Die cast aluminum housing
- Forest lenses
- Black polyester powder coat finish
- CCT adjustable 3000K/4000K/5000K
- 0-10V dimming driver
- Standard 2-³/₈" tenon, add-on accessories 3" tenon available
- Compatible with motion sensor and photocell




Dimension

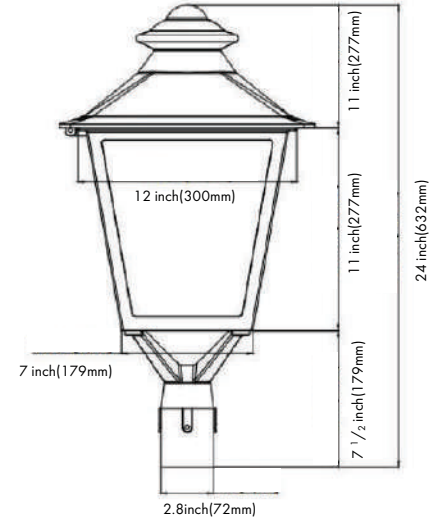

Product Performance Standard

Size	24"L X 11" W X 7" H	Power Factor	≥90%
Weight	20 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	0-10V Dimming
Color Temp	3CCT	THD	<20%
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~40C° (104°F)

Ordering Guide Example: LEDPPST 60W 3CCT

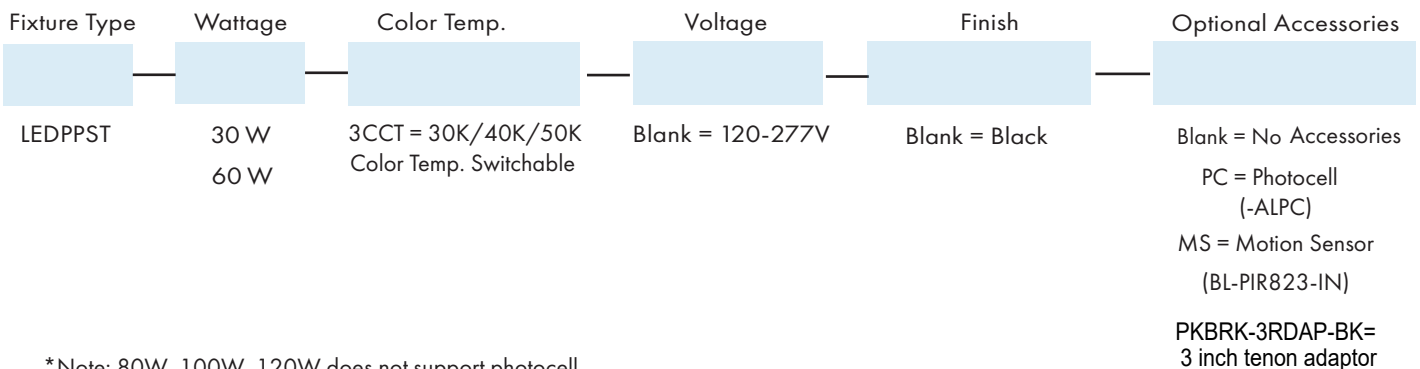

*Note: 80W, 100W, 120W does not support photocell.

Fixture Type:

Project Name:

Location:

Date:

Product Information

3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
30W	3400lm	113lm/W	3500lm	114lm/W	3600lm	115lm/W
60W	7000lm	116lm/W	7100lm	117lm/W	7200lm	118lm/W

Optional Accessories




Photocell Included

-SKU: ALPC
-3 PIN twist lock photocell is pre-installed by request.



PIR - Motion Sensor

-SKU: BL-PIR823-IN
-Internal PIR Motion Sensor is pre-installed by request.



3 Inch Tenon Adapter Black Finish

-SKU: PKBRK-3RDAP-BK
For use with Round, non-tapered steel and aluminum poles.
Furnished with three 3/8" hex head stainless-steel bolts.
Vertical tenon measures 2-3/8" O.D. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories