Liron

PPST Series Lantern Post Top

Fixture Type:

Project Name:

Location:

Date:


Features

- Traditional style LED Post Top
- Die cast aluminum housing
- Forest lenses
- Black polyester powder coat finish
- CCT adjustable 3000K/4000K/5000K
- 0-10V dimming driver
- Standard 2-³/₈" tenon, add-on accessories 3" tenon available
- Compatible with motion sensor and photocell




Product Performance Standard

Size	24″LX11″ W X 7″ H	Power Factor	≥90%
Weight	20 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	0-10V Dimming
Color Temp	3CCT	THD	<20%
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~40C °(104°F)



Ordering Guide Example: LEDPPST 60W 3CCT

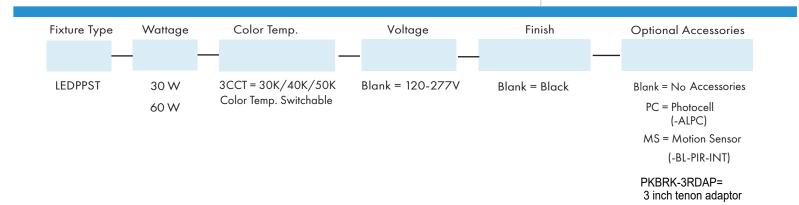


LEDPPST Rev 3-7-2022 PAGE 1 of 3





Dimension





Fixture Type:

Project Name:

Location:

Date:

Product Information

	30	ООК	400	OK	500	юк
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
30W	3400lm	113lm/W	3500lm	114lm/W	3600lm	115lm/W
60W	7000lm	116lm/W	7100lm	117lm/W	7200lm	118lm/W

Optional Accessories


	Photocell Included			
	-SKU: ALPC -3 PIN twist lock photocell is field installed or pre-installed by request.			
	PIR - Motion Sensor			
	-SKU: BL-PIR-INT -Internal PIR Motion Sensor is field installed or pre-installed by request.			
	3 Inch Tenon Adapter			
Ø2.36*(60mm)	-SKU: PKBRK-3RDAP			
	For use with Round, non-tapered steel and aluminum poles.			
	Furnished with three 3/8" hex head stainless-steel bolts.			
Ø3.46*(88mm)	Vertical tenon measures 2-3/8" O.D. Fixtures mounted to this bracket can be adjusted be vertically and horizontally.			

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories





Wiring Diagram

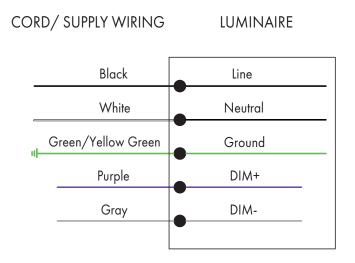

Fixture Type:

Project Name:

Location:

Date:



Scan the QR code or visit www.lironlighting.com/products/ledppst for the complete luminaire installation guide

Note:

