

Fixture Type:

Project Name:

Location:



Date:

Features

- Small LED flood light with 7Hx6V NEMA distributions
- Rugged die-cast aluminum housing
- Vented housing separated LEDs module from driver, maximizing fixture lifespan and performance
- Door frame seals to housing with a continuous extruded silicone gasket
- Knuckle or trunnion mount option
- Compatible with photocell



Dimension

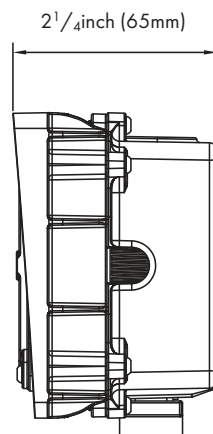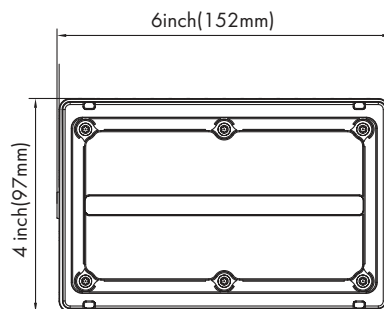

Product Performance Standard

Size	4" L X 6" W X 2 1/4" H	Power Factor	90%
Weight	2 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	Non Dimmable
Color Temp	4000K-5000K	NEMA Type	7H* 6V
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~40C° (104°F)

Ordering Guide

Example: LEDSFL 15W 40K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Mounting	Optional Accessories
LEDSFL	15W 27W	40K=4000K 50K=5000K	Blank = 120-277V	Standard finish: Blank = Dark Bronze 1 Premium finish: BK = Black WH = White	TM = Trunnion KN = Knuckle	Blank = No Accessories PC = Photocell (-WPPC)

Note: 1. Premium finish incur on additional cost, contact factory for MOQ and availability.

Fixture Type:
Project Name:
Location:
Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
15W	2000lm	133lm/W	2100lm	134lm/W
27W	3600lm	133lm/W	3700lm	134lm/W

Optional Accessories



Internal Photocell

- SKU: WPPC
- Internal photocell is field installed or pre-installed by request.


For the accessories detail, please visit www.lironlighting.com/add-on-accessories

Mounting Options




Knuckle Mount

-SKU: KN

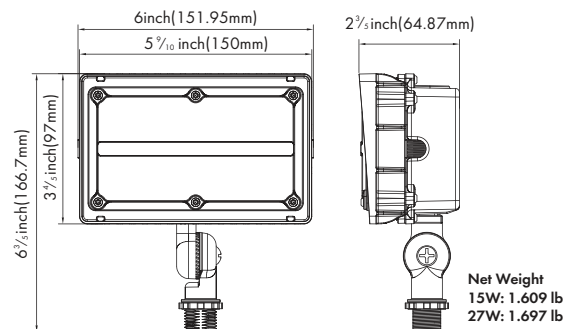

Trunnion Mount

-SKU: TM

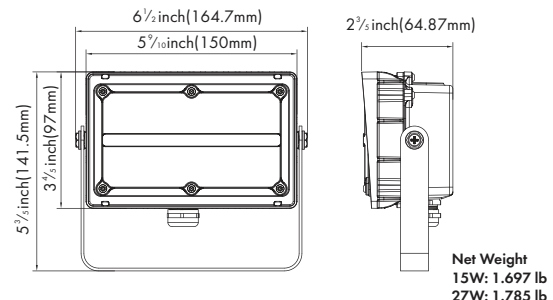




SFL Series Small Flood Light

Fixture Type:
Project Name:
Location:
Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

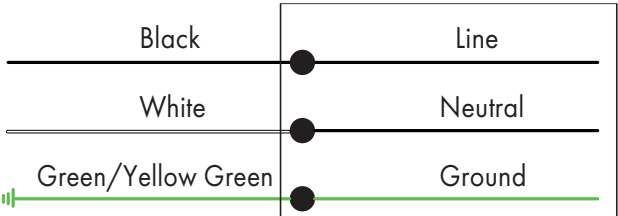

Scan the QR code or visit
www.lironlighting.com/product/ledsfl
for the complete luminaire installation guide.

Note:

