

Fixture Type:

Project Name:

Location:


Date:

Features

- Vandal proof lens
- Built with UV proof polycarbonate cover
- Optional brush nickel / dark bronze decorative trim
- Compatible with internal photocell
- Optional black, white or brush nickel strip trim set
- Suitable for wet location



Dimension

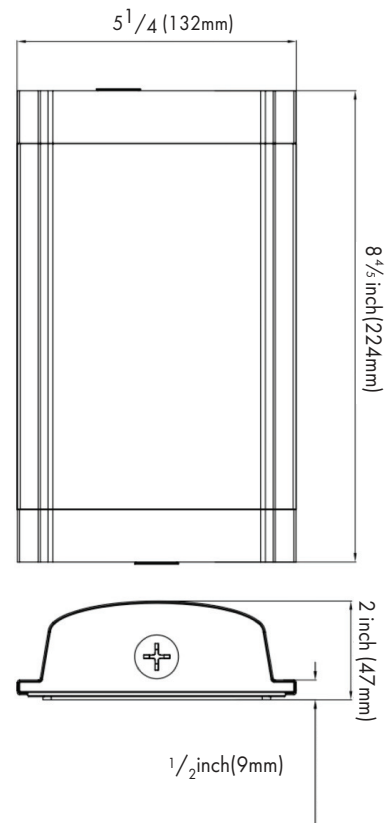

Product Performance Standard

Size	8 ⁴ / ₅ "L X 5 ¹ / ₄ "W X 2"H	Power Factor	≥90%
Weight	1 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	Non Dimmable
Color Temp	3000K/5000K	Photocell	YES
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~40C °(104°F)

Ordering Guide

Example: LEDSWM 10W 40K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Optional Accessories
LEDSWM	10W 15W	30K=3000K 50K=5000K	Blank = 120-277V	Blank = Dark Bronze	Blank =Without Accessories PC = Photocell (-WPPC) FRAME-SWM-DB (Dark Bronzed Trim) FRAME-SWM-BN (Brushed Nickle Trim) STRIPTRIM-SWM-BK STRIPTRIM-SWM-WH STRIPTRIM-SWM-BN

Product Information

	3000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
10W	980lm	98lm/W	1000lm	100lm/W
15W	1470lm	98lm/W	1500lm	100lm/W

Optional Accessories



Internal Photocell

- SKU: WPPC
- Internal photocell is field installed or pre-installed by request
- Provide efficient dusk-to-dawn on/off control



Decorative Frame

- SKU: FRAME-SWM-DB/FRAME-SWM-BN
- Brushed Nickel or Dark Bronze decorative trim



Strip trim black or white or brush nickel

- SKU: STRIPTRIM-SWM- BK/WH/BN
- Black or white finish trim

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories



SWM Series Slim Wall Mount

Fixture Type:

Project Name:



Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

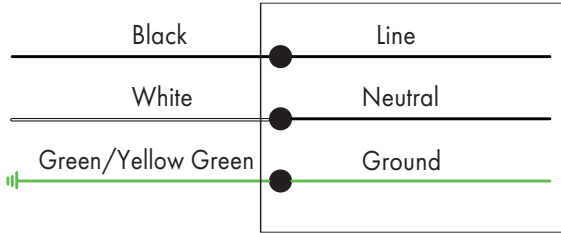

Scan the QR code or visit
www.lironlighting.com/products/ledswm
for the complete luminaire installation guide.

Note:

