

DD4 Series

LED 5CCT 6" Disk Downlight with Motion Sensor

Fixture Type:

Project Name:

Location:


Date:

Features

- 6" LED disk downlight
- Diffused polycarbonate lens controls direct glare from the LEDs
- Simple snap in installation for J-box
- Die-cast aluminum construction with a powder coat paint finish
- 15W with 1000 lumen output
- Selectable color temperature 5CCT :
2700/3000/3500/4000/5000K
- Integrated PIR motion sensor and adjustable timer function
1min/5min/10min
- Suitable for wet location



Adjustable timer switch
1min/5min/10min





5CCT 2700K/3000K/
3500K/4000K/5000K



Product Performance Standard

Size	6"	Power Factor	90%
Weight	2lb	Life Span	50,000 Hrs
Mounting	Surface mount/retrofit	Dimmable	Non dimmable
Color Temp	5CCT	Efficacy	up to 67 lm/W
CRI	80	Warranty	5 Years
Input Voltage	120V	Ambient Operation Temperature	-15C° (-4°F) ~ 40° (104°F)

Dimensions

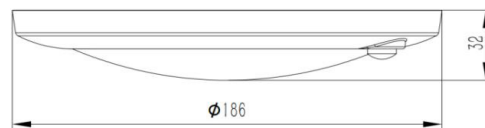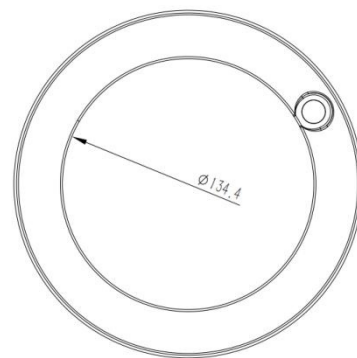

Ordering Guide

Example: DD4-15W6IN5CCTMS

Fixture Type

Size & Wattage

Color Temp.

Voltage

Finish

MS

DD4

15W6IN = 15Watt6Inch

5CCT
= 27/30/35/40/50K
(Color Temperature
Adjustable)

Blank = 120V

Blank = White

MS = Motion sensor
included

DD4 Series

LED 5CCT 6" Disk Downlight with Motion Sensor

Fixture Type:

Project Name:

Location:

Date:

Product Information

5000K

WATTAGE

15W

LUMEN


1000 lm

EFFICACY


67 lm/W

Installation


For 6 inch barrel




For 5 inch barrel




Connect wires
(white to white; black to black ,
copper wire to copper wire)



Thread the socket
adapter into the socket



After installation, clamp and
put the spring hoop into the
container



Set the CCT switch as you need

