

# Add-on Accessories Button Photocell

## Features

- AC input voltage range: 100-277V
- Low power consumption and high reliability
- 8-15s delay when turn off
- Strong anti interference ability
- Switch life is greater than 5000 cycles
- Approved application patent
- Suitable for dry and humid environment





## Product Performance Standard

<b>Voltage Rating</b>	100-277Vac	<b>Dim control output</b>	0-10V 25mA
<b>Rate Frequency</b>	50/60 Hz	<b>Mounting Height</b>	Max 40ft
<b>Switch Illumination</b>	10~20Lx on/60~80Lx off	<b>Power Consumption</b>	0.7W
<b>Net Weight</b>	90g	<b>Humidity</b>	Max.99%RH
<b>Temperature</b>	-40°F to 167°F(-40°C - 75°C)		

## Ordering Guide

Exmple : WPPC

## Dimensions

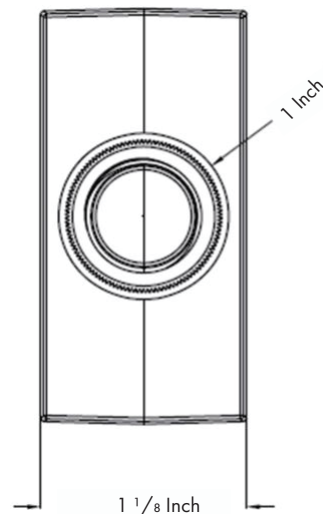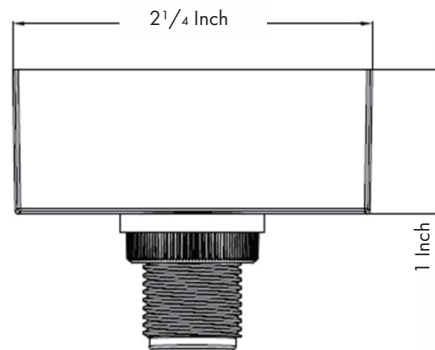

SKU

Description

WPPC

Button Photocell, Internal Install

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Add-on Accessories Button Photocell

### Wiring Diagram

