

Fixture Type:

Project Name:

Location:


Date:

Features

- Use in damp and dry environment
- For use on a wide ranges of LED fittings to convert them from standard to emergency fitting
- Additional relay that can control standard LED driver
- Deep discharge protection
- Connector between emergency kit and battery has the function of polarity reversal protection
- Used with LiFePO4 battery suits for LED fitting with external led driver



Dimension

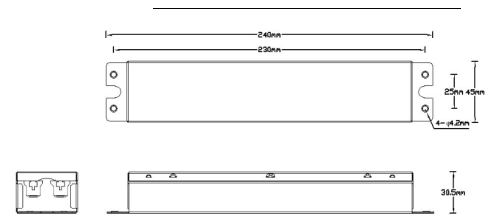

Product Performance Standard

SKU	EMBK8WH-A-INT01	Recharge Time	12 Hours
Voltage	100-277VAC	Discharge Time	90 Minutes
Battery Pack capacity	LifePO4 9.6V 1500mAH	Lumen Factor	100lm/W
Output Power	8W	Min Ambient Range	0 C°
Output Current	60mA	Max Ambient Range	50 C°

Wiring Diagram

