



AVI-IFAC-5A AVI-ON Contorl

Fixture Type:

Project Name:

Location:

Date:

Description

The IFA series fixture adapter mounts inside lighting fixtures providing addressability for each luminaire. All fixture adapters are part of the Avi-on® Bluetooth® with Mesh product ecosystem supported by the Avi-on mobile app, commissioning tools and cloud IoT Services.

Operation

The IFA supports 110V-277VAC. Plug any **1-10V dimmable** fixture into the the IFA. The IFA includes a 5A relay to switch the power off to the fixture. Includes dual 0-10V outputs for color changing and built in 15 minute energy monitoring (0.5% accurate).

Direct Connect Ready

Just plug any Avi-on Direct Connect Sensor into the sensor port for easy sensor integration. Sensor is powered directly from the IFA.

Application

The IFA is Avi-On most versatile individual fixture controller. It works with any 1-10V dimming driver

The IFA is any easy solution for almost any indoor commercial lighting project including office, manufacturing, warehouse, schools, gymnasiums, common area, UV-C lighting control, and outdoor area lights, floods, garage, parking lot and more.



Ordering Guide

Part Number

Voltage

Channel

Relay

AVI-IFAC-5A

120-277V

Single


5 Armp



10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

Dimension

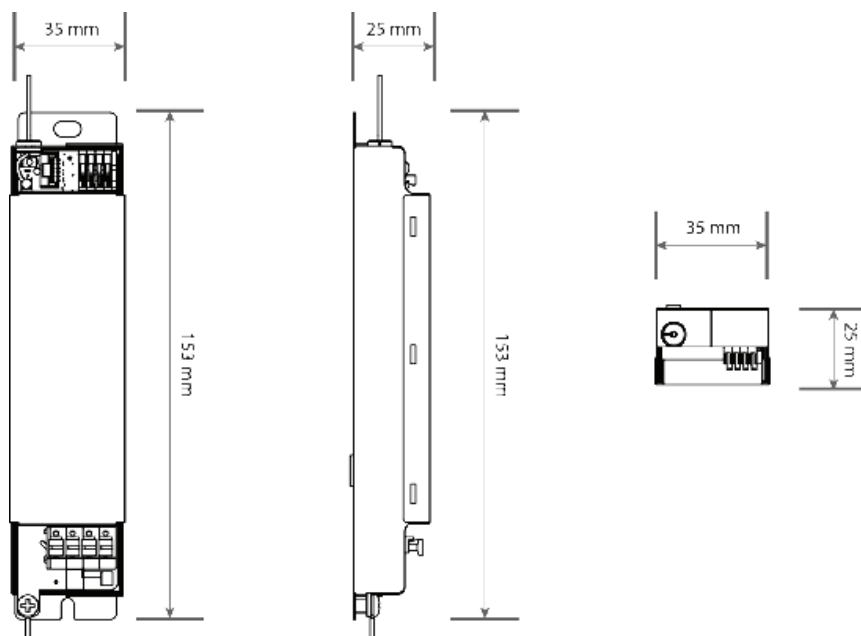

Wiring Diagram

