



Features

- 1.8 inch wide architecture linear light.
- 100% down light modular luminaires.
- Continuous seamless runs to any length.
- Suspended or surface mount available with 2Ft/4Ft/8Ft lengths, up to 1000 lumen per foot.
- CCT adjustable and wattage selectable
- Optional emergency battery backup available.

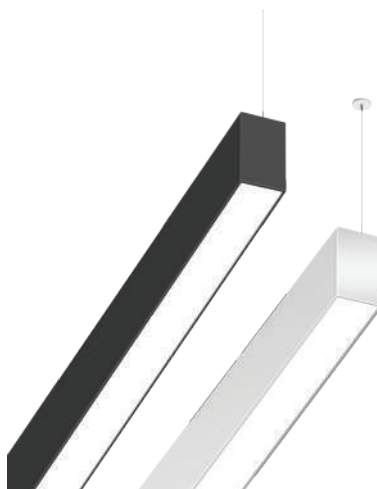

Dimension

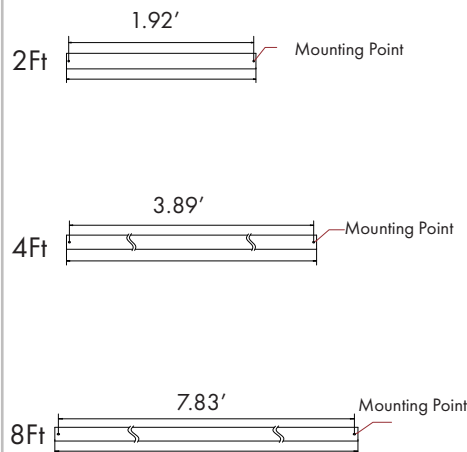

Product Performance Standard

Size	2FT/4FT/8FT	Power Factor	90%
Weight	3lbs/6lbs/12lbs	LED Lifespan	50,000 Hrs
CRI	80	Dimmable	0-10 Dimming
Color Temp	CCT Adjustable	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	0C° (32°F) ~40C° (104°F)

Ordering Guide

Example: ALB - 4FT-20/30/40W-3CT-WH

Fixture Type

Linear Feet

Wattage

Color Temp.

Finish

ALB

Nominal Linear Feet
= In increments
of 2 feet Fixture lengths
come in 2/4/8 feet.

10/15/20W= 2FT Wattage Selectable
20/30/40W= 4FT Wattage Selectable
40/60/80W= 8FT Wattage Selectable

3CT =
CCT adjustable
3000K/4000K/5000K

WH = White
BK = Black

Mounting Accessories

ALB-SPR = Round Canopy

ALB-SPS = Square Canopy



ALB Series Architecture Linear Base

Fixture Type:

Project Name:

Location:

Date:

Performance Data

Length	2ft	4ft	8ft
Wattage	10/15/20W	20/30/40W	40/60/80W
Efficacy	1000lm/ft	1000lm/ft	1000lm/ft
CCT	30/35/40K	30/35/40K	30/35/40K
Lens	PC Frosted 120°	PC Frosted 120°	PC Frosted 120°

Optional Accessories



External Emergency Battery Backup

SKU: F2EMBK8W170V-EXT

High voltage 8W emergency LED driver EM-H08170-LBF can be provided. When AC power fails, it immediately switches to the emergency mode, operating for lighting up to 120 minutes. When AC power is restored, it automatically returns to the charging mode which meets critical life-safety lighting requirements.


For the accessories detail, please visit www.lironlighting.com/add-on-accessories



Line Connection

120Vac: Connection up to 40 ft

277Vac: Connection up to 100 ft

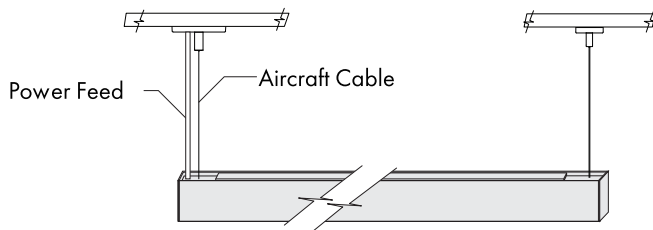


Mounting Point:

22.91" for 2FT fixture

45.83" for 4FT fixture

91.66" for 8FT fixture

Continuous Run

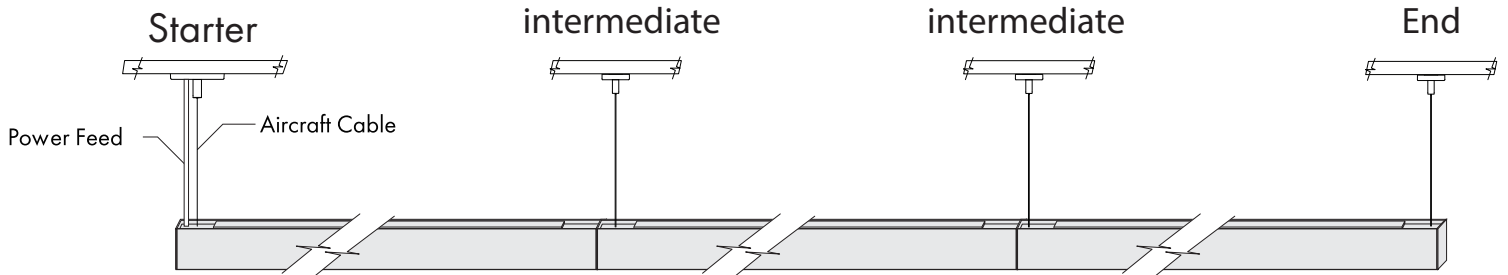

Mounting Point:

23.27" for 2FT fixture

46.54" for 4FT fixture

93.08" for 8FT fixture

Mounting Point:

23.62" for 2FT fixture

47.24" for 4FT fixture

94.48" for 8FT fixture

Mounting Point:

23.27" for 2FT fixture

46.54" for 4FT fixture

93.08" for 8FT fixture

Mounting Option




Pendant Mount



Surface Mount

Dry Ceiling / Off Grid

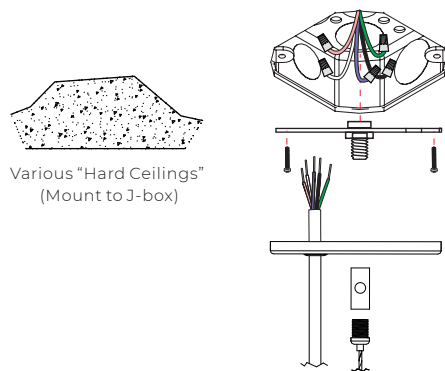

Drop Ceiling / On Grid

