

BLR Series Landscape Bollard

Fixture Type:

Project Name:

Location:


Date:

Features

- Durable die cast square housing
- Dark bronze polyester powder coat finish
- UV stabilized polycarbonate lens with annular
- 360 degrees surround illumination
- 1-10V dimming driver
- Robust ground cage pre-buried installation
- Compatible with emergency battery backup



Dimension

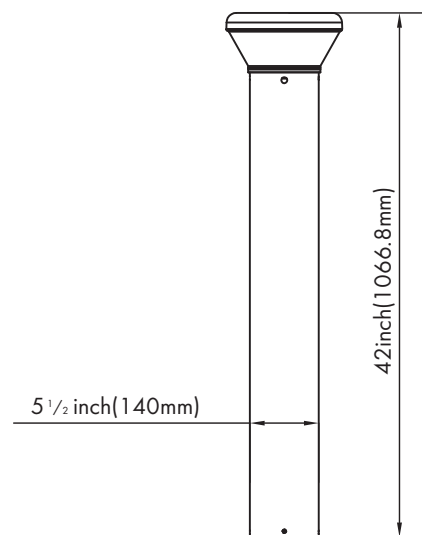

Product Performance Standard

Size	42L" X 5 1/2" W	Power Factor	≥90%
Weight	12 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	1 - 10V Dimming
Color Temp	4000K-5000K	THD	≤20%
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-45C° (-50°F) ~40C° (104°F)

Ordering Guide Example: LEDBLR 26W40K

Fixture type	Wattage	Color Temp.	Voltage	Finish	Options
LEDBLR	26W	40K=4000K 50K=5000K	Blank = 120-277V	Blank = Dark Bronzed BK = Black WH = White	Blank = No Accessories EM=Emergency Battery Backup (S-EMBK8WLV-INT)

Fixture Type:
Project Name:
Location:
Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
26W	3000lm	115lm/W	3100lm	119lm/W

Optional Accessories



Emergency Battery Backup

- SKU: S-EMBK8WLV-INT
- Internal battery backup is field installed or pre-installed by request.
- 1000 lumen for 90min emergency use.

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories




BLR Series Landscape Bollard

Fixture Type:
Project Name:
Location:
Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

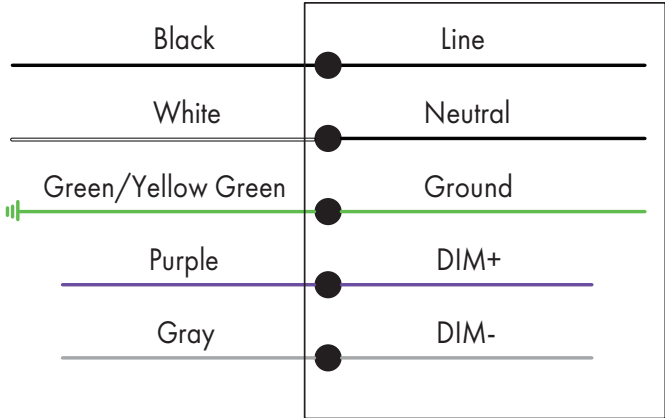

Scan the QR code or visit www.lironlighting.com/products/ledblr guide for the complete luminaire installation guide.

Note:

