

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Features




- Low profile, rugged die-cast aluminum housing
- Dark bronze powder coat finish
- UV stabilized polycarbonate optical lens
- Standard surface mount or J box mount
- 3/4" pendant mount available as an option



## Product Performance Standard

<b>Size</b>	9 1/2" X 9 1/2" X 3 1/4"	<b>Power Factor</b>	≥90%
<b>Weight</b>	4 lb	<b>LED Lifespan</b>	50,000 Hrs
<b>IP Rate</b>	IP65	<b>Dimmable</b>	Non Dimmable
<b>Color Temp</b>	4000K-5000K	<b>Photometry</b>	Parking Garage
<b>CRI</b>	70	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V/347-480V	<b>Ambient Operation Temperature</b>	-40C° (-40°F) ~45C° (113°F)

## Dimension

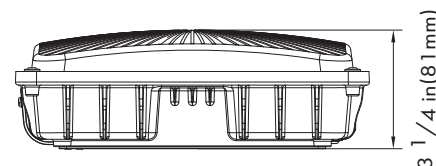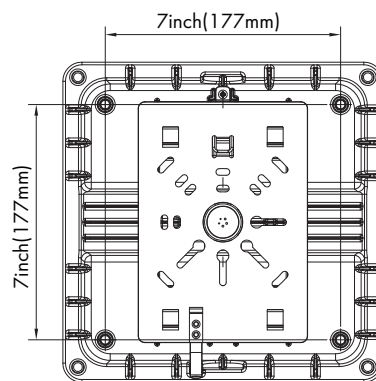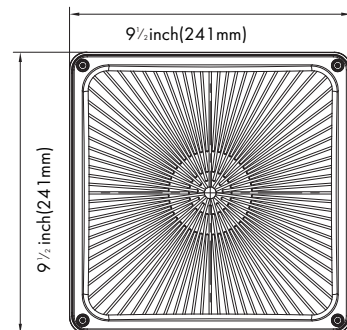

## Ordering Guide

Example: LEDCNP 27W 40K

Fixture Type

Wattage

Color Temp.

Voltage

Finish

LEDCNP

27W

40K=4000K

Blank = 120-277V

Blank = Dark Bronzed

40W

50K=5000K

HV = 347-480V

BK = Black

60W

WH = White

Note: The 40W and 60W are compatible with 347-480 input voltage



## CNP Series Square Canopy

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

### Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
27W	3750lm	130lm/W	3800lm	130lm/W
40W	5350lm	139lm/W	5450lm	141lm/W
60W	7800lm	134lm/W	8000lm	136lm/W





## CNP Series Square Canopy

**Fixture Type:**

**Project Name:**



**Location:**

**Date:**

### Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

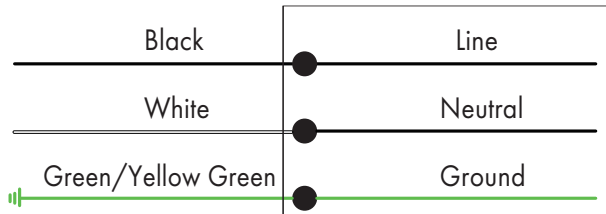

Scan the QR code or visit  
[www.lironlighting.com/product/ledcnp](http://www.lironlighting.com/product/ledcnp)  
for the complete luminaire installation guide.

Note:

---

---

---

---

---

---

---

