

Fixture Type:
Project Name:
Location:
Date:

Features

- Rugged die cast aluminum housing
- Dark bronze powder coat finish
- Polycarbonate optical lens with UV stabilizer
- Full cutoff with zero uplight and low glare at angles
- J box or surface mounting
- Compatible with photocell, emergency battery






Product Performance Standard

Size	18" L X 9 1/2" W X 9" H	Power Factor	90%
Weight	10 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	Non Dimmable
Color Temp	4000K-5000K	DLC	YES
CRI	70	Warranty	5 Years
Input Voltage	120-277V / 347-480V	Ambient Operation Temperature	-40C° (-40°F) ~45C° (113°F)

Ordering Guide

Example: LEDLFCUWP 90W 40K

Dimension

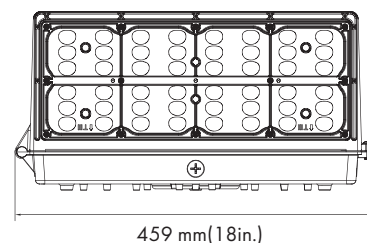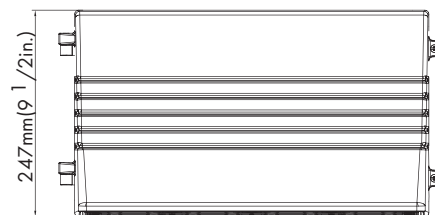

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Optional Accessories
LEDLFCUWP	90 W	40K=4000K	Blank = 120-277V	Blank = Dark Bronzed	Blank = No Accessories
	135W	50K=5000K	HV = 347 -480V	BK = Black WH = White	PC = Photocell (-WPPC) EM = Emergency Battery Backup (-A-EMBK8WLV-INT)

Note: Emergency battery backup only compatible with 90W

Fixture Type:
Project Name:
Location:
Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
90W	12200lm	136lm/W	12300lm	137lm/W
135W	18000lm	133lm/W	18000lm	133lm/W

Optional Accessories



Internal Photocell

- SKU: WPPC
- Internal photocell is field installed or pre-installed by request.



Internal Emergency Battery Backup

- SKU: A-EMBK8WLV-INT
- Internal battery backup is field installed or pre-installed by request.
- Delivery 1000 lumen for 90min emergency use
- Only suitable for 90W

For the accessories detail, please visit www.lironlighting.com/products/add-on-accessories

Fixture Type:

Project Name:


Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

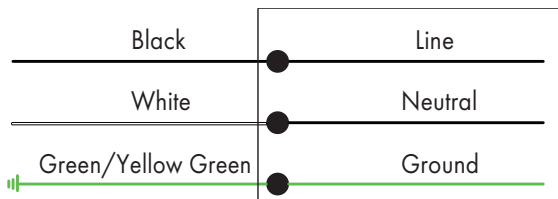

Scan the QR code or visit
www.lironlighting.com/products/ledlfcuwp
 for the complete luminaire installation guide.

Note: