

# **HZI Series**

Hazardous Location Fixture

|   | ۰ | 2 · |     |   |     |   |    |
|---|---|-----|-----|---|-----|---|----|
| ۰ | П | xt  | 111 | 0 |     | n | 0. |
|   |   |     | 0   | - | - 7 |   | ·- |

Project Name:

Location:

Date:

#### **Features**

- Copper-free aluminum housing with tempered glass lens
- High quality SMT LED and Meanwell driver
- Heavy duty and high impact resistance
- Gray epoxy powder coast finish
- Rugged housing with superior thermal design translates to long luminaire life
- Integrated junction box for driver
- 0-10V dimming
- Marine rating powder coated finish treatment
- Standard U bracket for Ceiling mount & wall mount hook mount/pole mount/arm mount also available
- Choice of glass or polycarbonate lens for different application
- Fixture operates safely in high ambient temperatures 40°F to 149°F(-40°C to 65°C)

## HZI1 (50W)



## HZI2 (40W/60W/80W/100W)



# Certification

### Marking UL844

Class I, Division 1, Groups C,D Class I, Division 2, Groups A, B, C, D Class II, Division 1, Groups E,F,G Class II, Division 2, Groups F,G Class III

#### **Marine Marking**

UL 1598, UL1598A ABS Other Rating IP 66























## **Ordering Guide**

| Fixture Type | Wattage            | Color Temp.  | Voltage          | Dimming     | Beam Angle  | Lens               |
|--------------|--------------------|--|------------------|-------------|-------------|--------------------|
|              |                    |  |                  |             |             |                    |
| HZI1         | 50W                | 35K = 3500K  | Blank = 100-277V | DIM = 0-10V | D120 = 120° | Blank = Glass Lens |
|              |                    | 40K = 4000K  | HV = 200-480V    |             |             |                    |
|              |                    | 50K = 5000K  |                  |             |             |                    |
|              |                    | <ul> <li>Mounting Method</li> </ul>  | ds               |             |             |                    |
|              | 40W                |  |                  |             |             |                    |
| HZI2         | 60W<br>80W<br>100W | CM = Ceiling Mount WM = Wall Mountin PM1 = Pole Mountin PEM = Pendant Mou CM = Chain Mountin | g<br>nting       |             |             |                    |



**HZI Series** Hazardous Location Fixture

| Fi | χtι | ıre    | Type: |
|----|-----|--------|-------|
|    |     | 260.02 |       |


Project Name:


Location:

Date:


# **Dimension**


## HZI1 (50W)

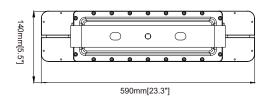




# HZI2 (40W/60W/80W/100W)







# Mounting

## **Ceiling Mount**






#### **Chain Mount**

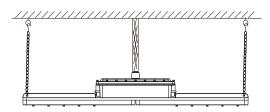

#### **Pendent Mount**

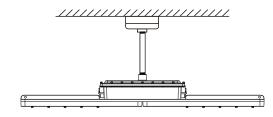





**HZI Series** Hazardous Location Fixture

| Fixture Type  | <b>:</b> : |
|---------------|------------|
| Project Name: |            |
| Location:     |            |
| Date:         |            |

# **Performance Data**

|        |         |          | 5000K    |          |
|--------|---------|----------|----------|----------|
| SERIES | WATTAGE | VOLTAGE  | LUMEN    | EFFICACY |
| HZI1   | 50W     | 100-277V | 7000 lm  | 140 lm/W |
|        | 40W     | 100-277V | 5600 lm  | 140 lm/W |
| HZI2   | 60W     | 100-277V | 8400 lm  | 140 lm/W |
| 11212  | 80W     | 100-277V | 12000 lm | 140 lm/W |
|        | 100W    | 100-277V | 14000 lm | 140 lm/W |







# **HZI Series**


Hazardous Location Fixture

| Fixture Type: |  |  |
|---------------|--|--|
| Project Name: |  |  |
| Location:     |  |  |
| Date:         |  |  |

# **Mounting Methods**

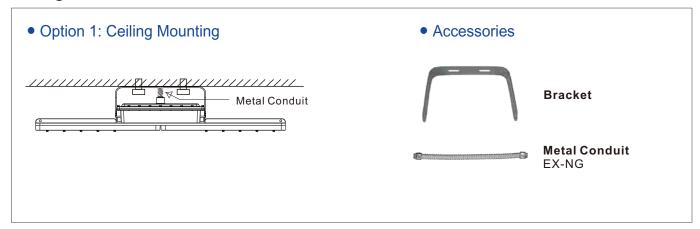

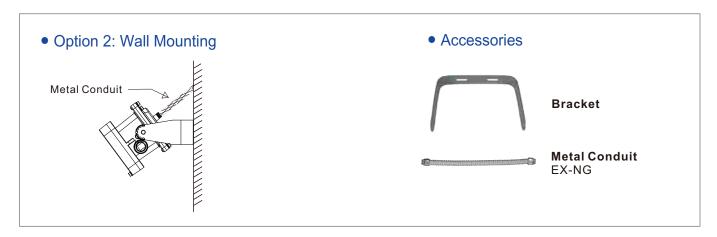

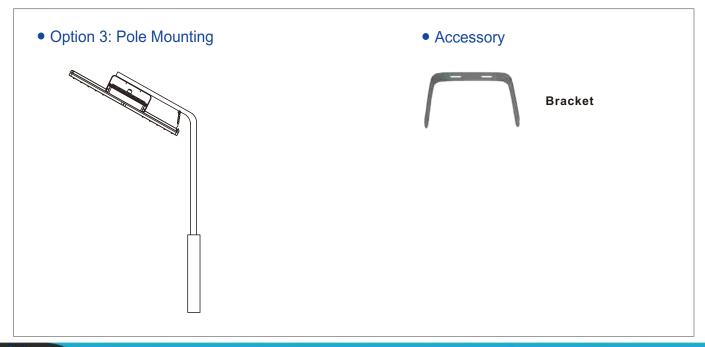



# **HZI Series**

Hazardous Location Fixture

| Fixture Type: |  |
|---------------|--|
| Project Name: |  |
| Location:     |  |
| Date:         |  |

# **Mounting Methods**

