

**Fixture Type:**

**Project Name:**

**Location:**


**Date:**

## Features

- Vandal proof lens
- Built with UV proof polycarbonate cover
- Optional brush nickel / dark bronze decorative trim
- Compatible with internal photocell



## Dimension

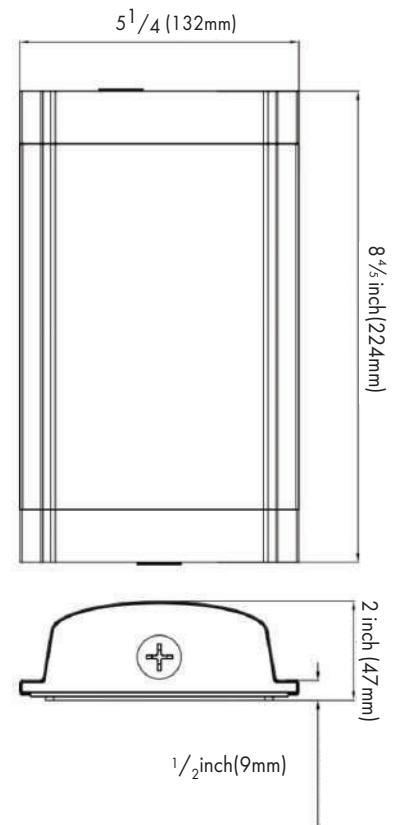

## Product Performance Standard

<b>Size</b>	8 4/5" L X 5 1/4" W X 2" H	<b>Power Factor</b>	≥90%
<b>Weight</b>	1 lb	<b>LED Lifespan</b>	50,000 Hrs
<b>IP Rate</b>	IP65	<b>Dimmable</b>	Non Dimmable
<b>Color Temp</b>	3000K/5000K	<b>Photocell</b>	YES
<b>CRI</b>	80	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V	<b>Ambient Operation Temperature</b>	-40C° (-40°F) ~40C° (104°F)

## Ordering Guide

Example: LEDSWM 10W 40K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Optional Accessories
LEDSWM	10W 15W	30K=3000K 50K=5000K	Blank = 120-277V	Blank = Dark Bronzed	Blank =Without Accessories PC = Photocell (-WPPC) FRAME-SWM-DB (Dark Bronzed Trim) FRAME-SWM-BN (Brushed Nickle Trim)

**Fixture Type:**

Project Name:

Location:

Date:

## Product Information

3000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
10W	980lm	98lm/W	1000lm	100lm/W
15W	1480lm	98lm/W	1500lm	100lm/W

## Optional Accessories



### Internal Photocell

- SKU: WPPC
- Internal photocell is field installed or pre-installed by request
- Provide efficient dusk-to-dawn on/off control



### Decorative Frame

- SKU: FRAME-SWM-DB/FRAME-SWM-BN
- Brushed Nickel or Dark Bronze decorative trim

For the accessories detail, please visit [www.lironlighting.com/product\\_categories/add-on-accessories](http://www.lironlighting.com/product_categories/add-on-accessories)



## SWM Series Slim Wall Mount

**Fixture Type:**

**Project Name:**


**Location:**

**Date:**

### Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

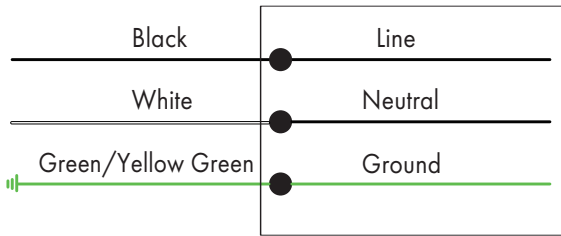

Scan the QR code or visit  
[www.lironlighting.com/products/ledswm](http://www.lironlighting.com/products/ledswm)  
for the complete luminaire installation guide.

Note:

---

---

---

---

---

