

2CD Series JBox Split Downlight

Features


- CCT adjustable option by dip switch (3000K, 4000K, 5000K)
- 110-277VAC Input Option
- Split design of led light engine and trim, one engine allows for seamless integration of multiple trim options
- Trim sizes: 4", 6", 8"
- Trim types: round, square and wall wash
- Simple Installation with spring-action housing clips
- Integrated J-Box for direct wire eliminated recessed can, perfect and economic solution for new construction applications.
- 5 years limited warranty



Product Performance Standard

Size	$3^{1/2}$ " L X Ø $4^{1/8}$ "	Power Factor	≥90%
Weight	1 lb	LED lifespan	50,000 Hrs
Mounting	Recessed	Dimmable	1-10V Dimmable
Color Temp	3CCT/Single Color Temp.	Energy Star	YES
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~40C °(104°F)

Ordering Guide Example: LED2CD 15W 40K

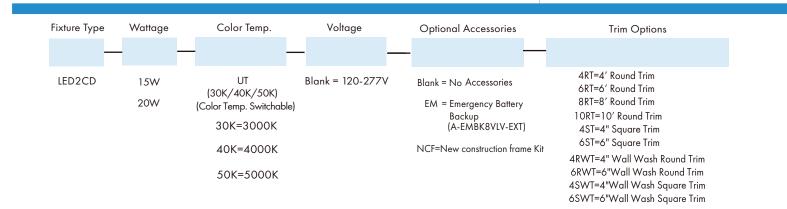

LED2CD Rev 10-18-2021




Fixture Type:

Project Name:

Location:

Date:



PAGE 1 of 4

Dimension

15W/20W



2CD Series JBox Split Downlight

Fixture Type:

Project Name:

Location:

Date:

Product Information

	3000K		4000K		5000K		
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	
15W	1125lm	75lm/W	1170lm	78lm/W	1200lm	80lm/W	
20W	1500lm	751m/W	1560lm	78lm/W	1600lm	80lm/W	

Optional Accessories

Emergency Battery Backup	
-SKU: F2EMBK8W170V-EXT -External battery backup is field installed. -90min for emergency use.	
New construction frame	
-SKU: CDFRAME-3/4/6 -New construction frame 3"/4"/6"	





2CD Series JBox Split Downlight

Fixture Type:

Project Name:

Location:

Date:

Optional Trim



PAGE 3 of 4






2CD Series JBox Split Downlight

Wiring Diagram

CORD/ SUPPLY WIRING

luminaire



Fixture Type:

Project Name:

Location:

Date:



Scan the QR code or visit www.lironlighting.com/products/led2cd for the complete luminaire installation guide.

Note:



