

## Features



- Durable polycarbonate housing
- Polycarbonate latches
- Includes sealed conduit adaptor for 1/2" conduit
- Ribbed frosted polycarbonate lens
- 0-10V dimming driver
- Surface mount
- Compatible with motion sensor and emergency battery



## Product Performance Standard

Size	2FT/4FT	Power Factor	≥90%
Weight	6 lb/8 lb	LED lifespan	50,000 Hrs
Color Temp	4000K - 5000K	Dimmable	0-10V Dimming
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~56C° (133°F)

## Dimension

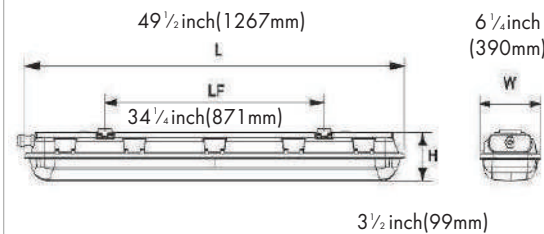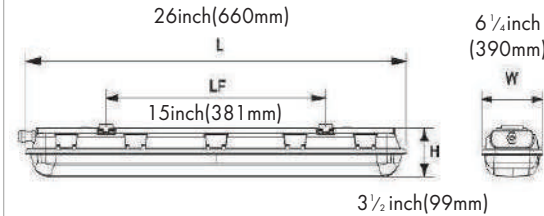

## Ordering Guide

Example: LED2VT 4FT 45W 50K

Fixture Type	Size&Wattage	Color Temp.	Voltage	Finish	Optional Accessories
LED2VT	2FT 25 W	40K=4000K	Blank = 120-277V	Blank =White	Blank = No Accessories
	4FT 45 W	50K=5000K			MS = Motion Sensor (BL-PIR-EXT) EM = Emergency Battery Backup (S-EMBK8WLV-INT)

## Product Information

		4000K		5000K	
LENGTH	WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
2'	25W	2928lm	123lm/W	3000lm	125lm/W
4'	45W	4428lm	123lm/W	4500lm	125lm/W

## Optional Accessories



### PIR - Motion Sensor

- SKU: BL-PIR-EXT
- External PIR Motion Sensor is field installed or pre-installed by request.



### Emergency Battery Backup

- SKU: S-EMBK8WLV-INT
- Internal battery backup is field installed or pre-installed by request.
- Delivery 1000 lumen for 90min emergency use.


For the accessories detail, please visit [www.lironlighting.com/add-on-accessories](http://www.lironlighting.com/add-on-accessories)

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

## Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

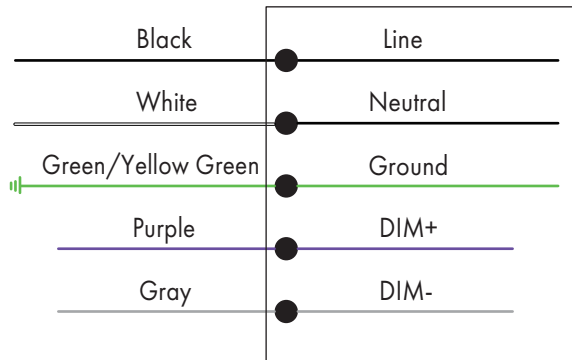

Scan the QR code or visit  
[www.lironlighting.com/product/led2vt](http://www.lironlighting.com/product/led2vt)  
 for the complete luminaire installation guide.

Note:

---

---

---

---

---

---

---

---